

Laminar Stream - 1.5 & 2.2 gpm

Flow Restricted Junior Size M21.5x1

NEOPERL®

flow, stop and go®

Features and Benefits

- Watercolours™ design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- Anti-clogging dome screen filters sediment and particles.
- Threads directly into the faucet spout. Virtually invisible once installed.
- Vandal resistant by design (install and remove with a special key).

Certifications

ANSI/ NSF® -61-372

ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

WaterSense (1.5 gpm)

2.2 gpm not applicable for WaterSense




Options Available

Part #	Color	gpm	L/min
CCL-150JU-N	Green / Light Gray	1.5	5.7
CCL-220JU-N	Red / Light Gray	2.2	8.3
CCT-050	Caché® Key (Red)		


Technical Data

Materials:	Body	Acetal
	Int. O-ring	EPDM
	Ext. O-ring	Silicone

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.




Packaging:

Threaded Insert

1 pc (bag), 6 pcs (bag), 50 pcs (bag)

Dimensions

Mounting Dimensions

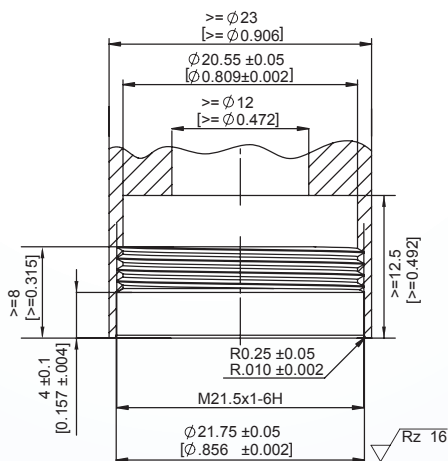

Dimensions

