

Faucet Aerator - 0.35 to 1.0 gpm Pressure Compensating Junior Size 13/16"-27



flow, stop and go®

Features and Benefits

- **Smart lime build up cleaning with unique silicone bottom.**
- Watercolours™ design: Color coding to identify flow rate & stream pattern
- Patented construction provides a splash-free, non-aerated spray
- Pressure compensating for constant flow from 20 to 80 psi.
- Anti-clogging dome screen filters sediment and particles.
- With built-in 13/16"-27 male threads to thread directly into the cavity of a traditional regular male aerator (no housing needed to connect).
- Vandal resistant by design (install and remove with a special key).
- Virtually invisible once installed.


Certifications

ANSI/NSF® -61-372 (16 033 pending)

ASME A112.18.1M and CSA B125 (16 033 pending)

Meets **CALGreen** requirements


WaterSense (1.0 gpm pending)

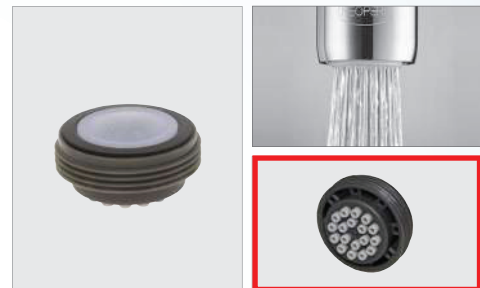



Technical Data

Materials:	Body	Acetal
	Tips	Silicone
	Washer	NBR
	O-ring	EPDM

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.



Options Available


Part #	Color	gpm	L/min
CSAS-035JU-PSLC	Brown / Gray	0.35	3.8
CSAS-050JU-PSLC	Green / Gray	0.5	5.7
CSAS-100JU-PSLC	Blue / Gray	1.0	6.6
CCT-SLIM-JU	Green Service Key*		

Packaging:


Threaded Insert 1 pc (bag), 6 pcs (bag), 50 pcs (bag)

Dimensions

Mounting Dimensions

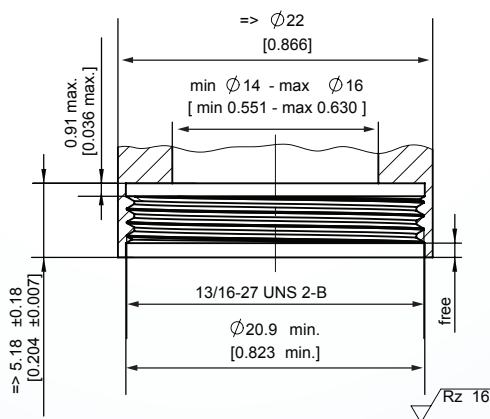

Dimensions

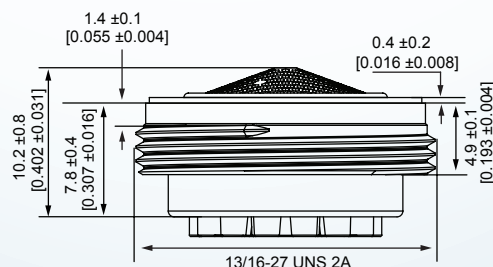

ATTENTION!

MAXIMUM MOUNTING TORQUE
1 Nm steadily applied