



flow, stop and go®

Hidden Faucet Aerator - 1.0 to 2.2 gpm Pressure Compensating Regular Size 15/16"-27

Features and Benefits

- Shorter in height for a lower profile to replace the Slim * / Slim * Air.
- Watercolours * design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Threads directly into the faucet spout. Virtually invisible once installed.
- Vandal resistant by design (install and remove with a special key).


Certifications

ANSI/ NSF * -61-372
ASME A112.18.1M and CSA B125 (1.0 gpm pending)
Meets **CALGreen** requirements
WaterSense (1.0 & 1.5 gpm pending)
1.8, 2.0, 2.2 gpm not applicable for WaterSense
Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.2 & 1.8 gpm)



Technical Data

Materials:	Housing	Chrome plated
	Insert	Acetal
	O-ring	EPDM
	Washer	EPDM

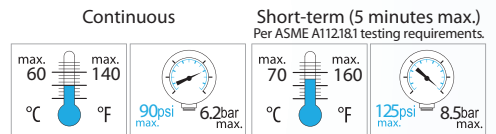

Options Available


Part #	Color	gpm	L/min
CSSC-100M-P	Blue / Dark Gray	1.0	3.8
CSSC-120M-P	Pink / Dark Gray	1.2	4.5
CSSC-150M-P	Green / Dark Gray	1.5	5.7
CSSC-180M-P	Light Blue / Dark Gray	1.8	6.6
CSSC-200M-P	Lavender / Dark Gray	2.0	7.2
CSSC-220M-P	Yellow / Dark Gray	2.2	8.3
CCT-060	Caché * Key (Gray)		

Packaging:

PCA * Shorty Crown 1 pc (bag), 50 pcs (bag)

Dimensions

Mounting Dimensions

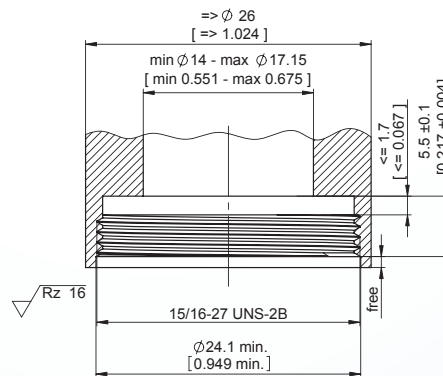

Dimensions

