

## Hidden Faucet Attachment - 0.5 gpm SLC

Pressure Compensating Regular Size M24x1

### Features and Benefits

- ▶ **Unique silicone bottom for easy cleaning.**
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Threads directly into the faucet spout. Virtually invisible once installed.
- ▶ Vandal resistant by design (install and remove with a special key).

### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125 (pending)  
Meets **CALGreen** requirements

### Options Available

Part #	Color	gpm	L/min
CCC-050ST-P	Lime Green / Dark Gray	0.5	1.9
CCT-060	Caché™ Key (Gray)		

### Packaging:


Threaded Insert 1 pc (bag), 6 pcs (bag), 50 pcs (bag)




### Technical Data

Materials:	Body	Acetal
	Tips	Silicone
	Int. O-ring	EPDM
	Ext. O-ring	Silicone

#### Continuous




#### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.



### Dimensions

#### Mounting Dimensions

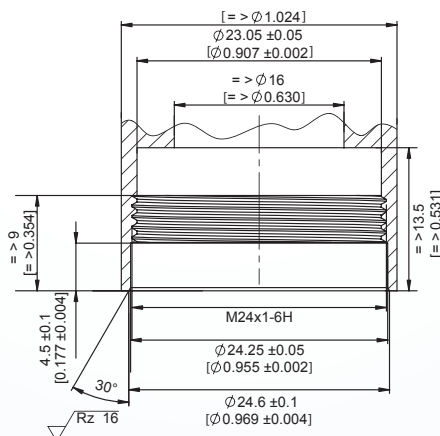

#### Dimensions

