

Laminar Stream - Full Flow

Slim Size M18.5x1

Features and Benefits

- ▶ Integrated anti-liming Honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ With built-in M18 male threads to thread directly into the cavity of a traditional (no housing needed to connect).
- ▶ Virtually invisible once installed.

Certifications

ANSI/NSF * -61-372

Options Available

Part #	Color	gpm	L/min
CSLA-FULL-M18N	White / Gray	Full Flow	Full Flow
CCT-SLIM-TT	Blue Service Key		



Technical Data


Materials: Body

Acetal


Wetted surface area:

1536 mm²

Continuous




Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.




Dimensions

Mounting Dimensions

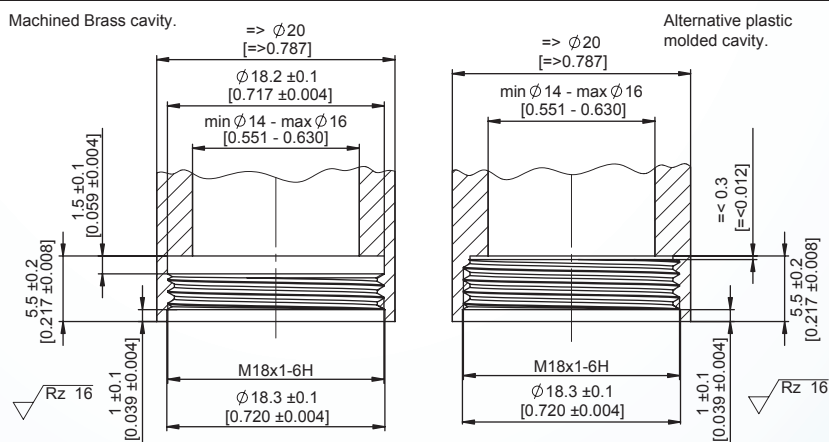

Aerator Dimensions

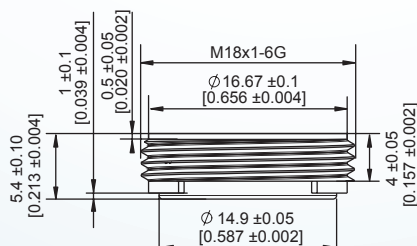

ATTENTION!

MAXIMUM MOUNTING TORQUE

1 Nm steadily applied

Refer to SAS-1 for further assembly instructions.