

Faucet Aerator - 1.0 gpm max SLC Dual Core Pressure Compensating Junior Size




flow, stop and go®

Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

Certifications

ANSI/ NSF® -61-372 (14465, 14474, 14484 pending)
ASME A112.18.1M and CSA B125 (14474 & 14484 pending)
Meets **CALGreen** requirements
WaterSense (14474 & 14484 pending)

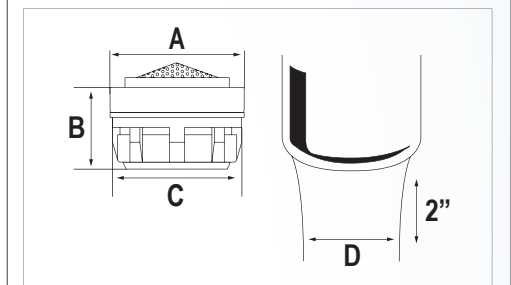

Thread & Part Number

Part #	Designation	Thread Size
SLA-100INJU-P	Insert only	
SLA-100MJU-P	Junior male	13/16"-27
SLA-100FJU-P	Junior female	3/4"-27
SLA-100MJU-P	VVPandal proof junior male	13/16"-27
SLA-100FJUVP-P	Vandal proof junior female	3/4"-27

Other product combinations available.


Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Blue	Dark Gray

Flow Rate Curve

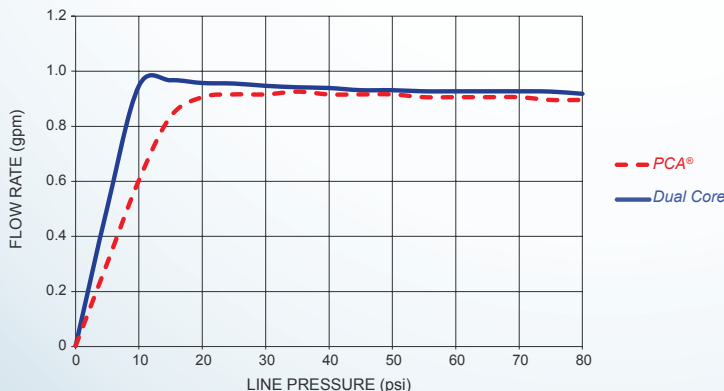

Dimensions

No	mm	In
A	18.10	.713
B	12.60	.496
C	17.40	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
Tip Silicone
O-ring EPDM
Washer EPDM
Wetted surface area: 4651 mm²

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.