

Faucet Aerator - 1.2 gpm max Dual Core Pressure Compensating Junior Size



flow, stop and go®

Features and Benefits

- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

Certifications

ANSI/ NSF® -61-372 (14 559 & 14 578 pending)
 ASME A112.18.1M and CSA B125 (14 559 & 14 578 pending)
 Meets **CALGreen** requirements
 WaterSense (14 559 pending)
 Complies with CEC Amendment to CCR Title 20, section 1605.3



Thread & Part Number

Part #	Designation	Thread Size
TSA-120INJU-P	Insert only	
TSA-120MJU-P	Junior male	13/16"-27
TSA-120FJU-P	Junior female	3/4"-27
TSA-120DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
TSA-120MJUVP-P	Vandal proof junior male	13/16"-27
TSA-120FJUVP-P	Vandal proof junior female	3/4"-27
TSA-120DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Pink	Dark Gray


Flow Rate Curve

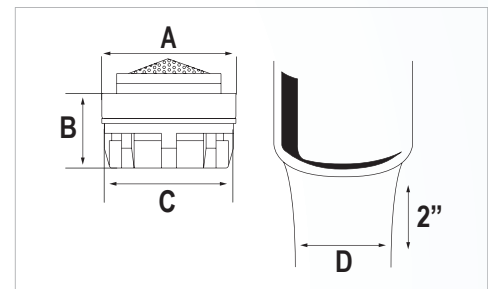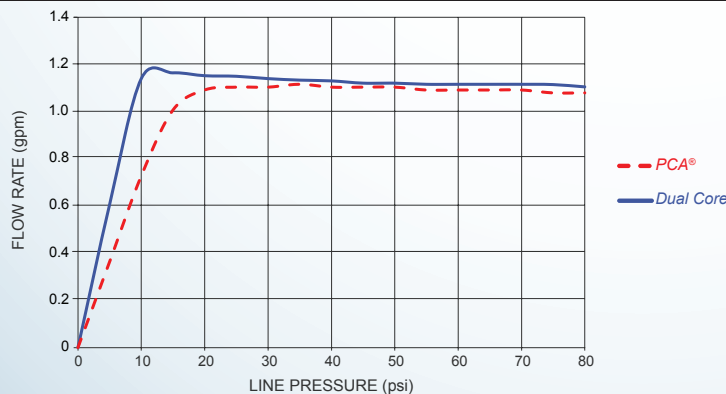

Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16


Housings

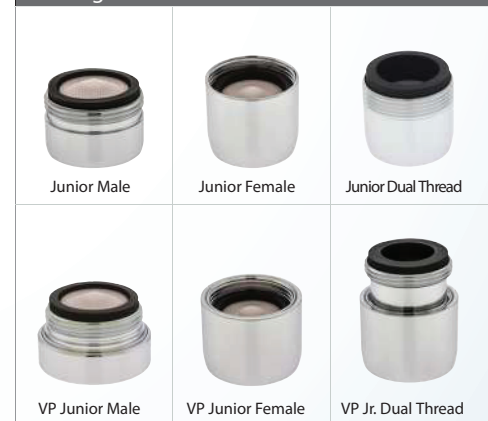

Technical Data

Materials: Body Acetal
 O-ring EPDM
 Washer EPDM

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

