


Faucet Aerator - 1.2 gpm max SLC Dual Core Pressure Compensating Junior Size

Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

Certifications

ANSI/ NSF® -61-372 (16474 & 16484 pending)
 ASME A112.18.1M and CSA B125 (16474 & 16484 pending)
 Meets **CALGreen** requirements
 WaterSense (16474 & 16484 pending)
 Complies with CEC Amendment to CCR Title 20, section 1605.3

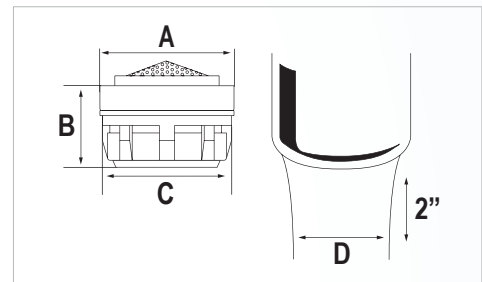

Thread & Part Number

Part #	Designation	Thread Size
SLA-120INJU-P	Insert only	
SLA-120MJU-P	Junior male	13/16"-27
SLA-120FJU-P	Junior female	3/4"-27
SLA-120MJUVP-P	Vandal proof junior male	13/16"-27
SLA-120FJUVP-P	Vandal proof junior female	3/4"-27

Other product combinations available.


Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Pink	Dark Gray

Flow Rate Curve

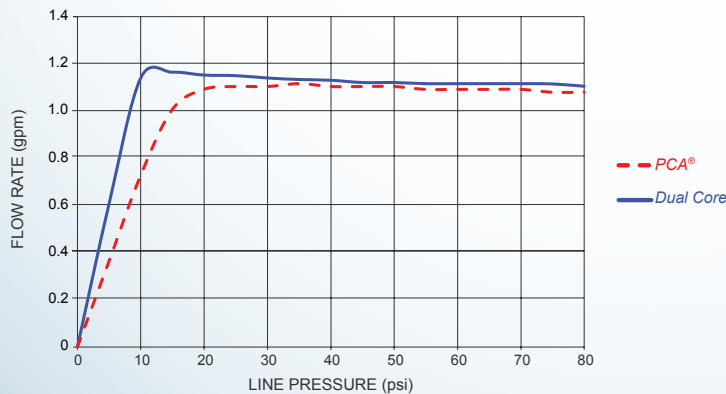

Dimensions

No	mm	In
A	18.10	.713
B	12.60	.496
C	17.40	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Acetal
 Tip Silicone
 O-ring EPDM
 Washer EPDM
 Wetted surface area: 4651 mm²

max. 60 °C	max. 140 °F	90psi max.	6.2bar max.	max. 70 °C	max. 160 °F	125psi max.	8.5bar max.
------------	-------------	------------	-------------	------------	-------------	-------------	-------------

Continuous Short-term (5 minutes max.)
 Per ASME A112.18.1 testing requirements.