

## Faucet Aerator - 1.5 gpm max SLC Dual Core Pressure Compensating Junior Size

### Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

### Certifications

ANSI/ NSF® -61-372 (12474 & 12484 pending)  
ASME A112.18.1M and CSA B125 (12474 & 12484 pending)  
Meets **CA Green** requirements  
WaterSense (12474 & 12484 pending)



### Thread & Part Number

Part #	Designation	Thread Size
SLA-150INJU-P	Insert only	
SLA-150MJU-P	Junior male	13/16"-27
SLA-150FJU-P	Junior female	3/4"-27
SLA-150MJUVP-P	Vandal proof junior male	13/16"-27
SLA-150FJUVP-P	Vandal proof junior female	3/4"-27

Other product combinations available.



### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Natural	Green	Dark Gray


### Flow Rate Curve

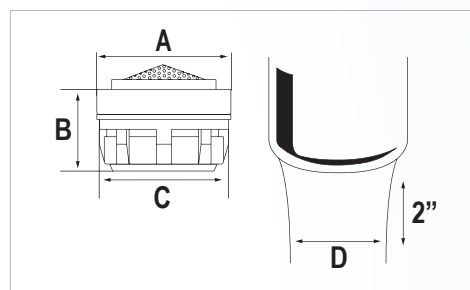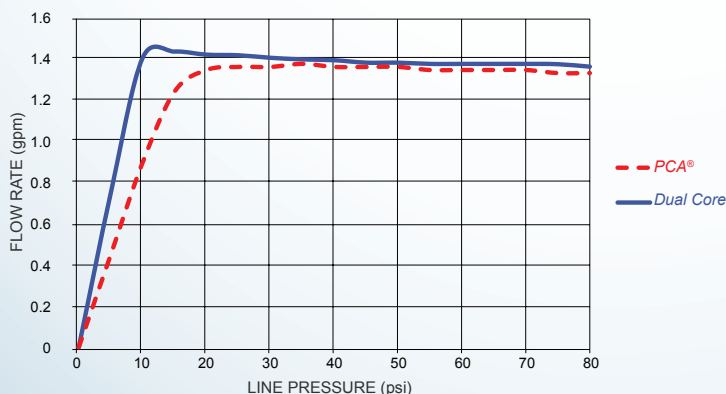





### Dimensions

No	mm	In
A	18.10	.713
B	12.60	.496
C	17.40	.685
D	≈ 11	≈ 7/16
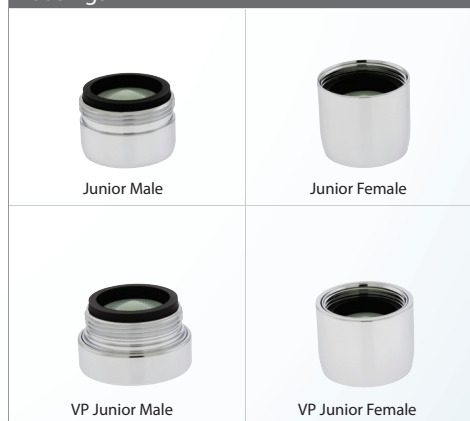
### Housings



### Technical Data

Materials:	Body Tip O-ring Washer	Acetal Silicone EPDM EPDM	
Wetted surface area:	4651 mm <sup>2</sup>		
Continuous	Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.		
<div><div>max. 60 °C</div><div>max. 140 °F</div><div></div></div>	<div><div>max. 70 °C</div><div>max. 160 °F</div><div></div></div>	<div><div>max. 90psi max. 6.2bar</div><div></div></div>	<div><div>max. 125psi max. 8.5bar</div><div></div></div>