

Faucet Aerator - 1.5 gpm Flow Restricted Junior Size



flow, stop and go®

Features and Benefits

- Watercolours™ design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Available housing finishes: chrome, polished brass, & brushed nickel.
- Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/ NSF™ -61-372 (10 678 pending)
ASME A112.18.1M and CSA B125 (10 678 pending)
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
TSA-150INJU-N	Insert only	
TSA-150MJU-N	Junior male	13/16"-27
TSA-150FJU-N	Junior female	3/4"-27
TSA-150DTJU-N	Junior dual thread	13/16"-27 x 3/4"-27
TSA-150MJUVP-N	Vandal proof junior male	13/16"-27
TSA-150FJUVP-N	Vandal proof junior female	3/4"-27
TSA-150DTJUVP-N	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Ring	Basket
Green	White	Dark Gray

Flow Rate Curve

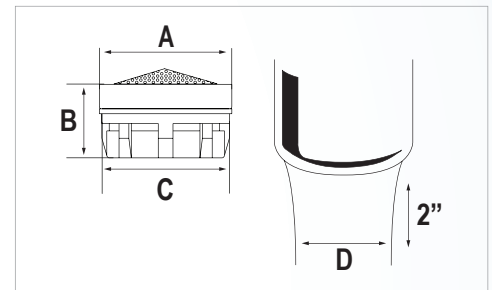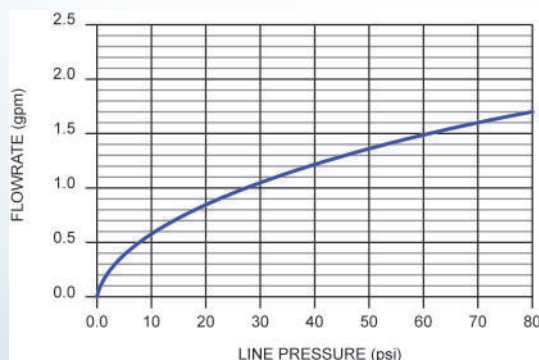

Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16

Housings



Technical Data

Materials: Body Washer Acetal
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

