

## Faucet Aerator - 1.5 gpm max Dual Core Pressure Compensating Junior Size



flow, stop and go®

### Features and Benefits

- ▶ **Integrated PCA® Dual Core flow regulator provides optimum stream performance.**
- ▶ **Watercolours® design:** Color coding to identify flow rate and stream pattern
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

### Certifications

ANSI/ NSF® -61-372 (11 178 pending)  
ASME A112.18.1M and CSA B125 (11 178 pending)  
Meets **CALGreen** requirements  
WaterSense



### Thread & Part Number

Part #	Designation	Thread Size
TSA-150INJU-P	Insert only	
TSA-150MJU-P	Junior male	13/16"-27
TSA-150FJU-P	Junior female	3/4"-27
TSA-150DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
TSA-150MJUVP-P	Vandal proof junior male	13/16"-27
TSA-150FJUVP-P	Vandal proof junior female	3/4"-27
TSA-150DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Natural	Green	Dark Gray

### Flow Rate Curve

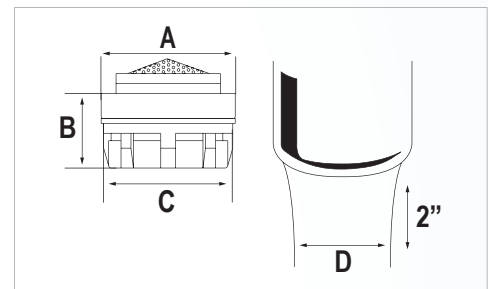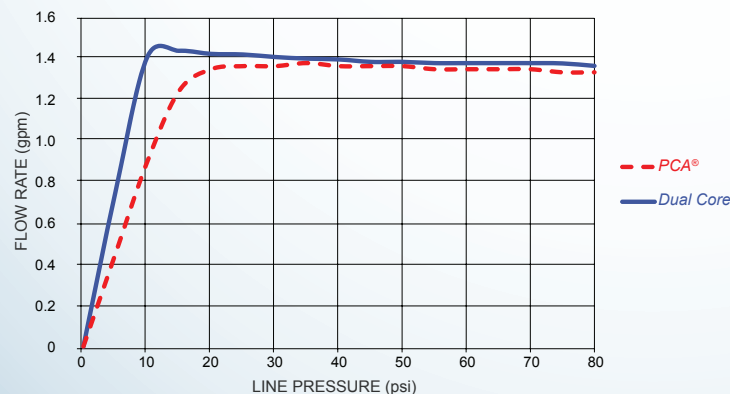

### Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16


### Housings



### Technical Data

Materials:	Body	Acetal
	O-ring	EPDM
	Washer	EPDM

### Continuous



### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

