

## Faucet Aerator - 1.8 gpm max SLC Dual Core Pressure Compensating Junior Size

### Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

### Certifications

ANSI/ NSF® -61-372 (12474 & 12484 pending)  
ASME A112.18.1M and CSA B125 (12474 & 12484 pending)  
Meets **CALGreen** requirements

### Thread & Part Number

Part #	Designation	Thread Size
SLA-180INJU-P	Insert only	
SLA-180MJU-P	Junior male	13/16"-27
SLA-180FJU-P	Junior female	3/4"-27
SLA-180MJUVP-P	Vandal proof junior male	13/16"-27
SLA-180FJUVP-P	Vandal proof junior female	3/4"-27

Other product combinations available.



### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Natural	Light Blue	Dark Gray

### Flow Rate Curve

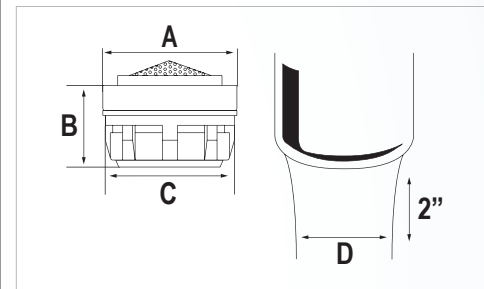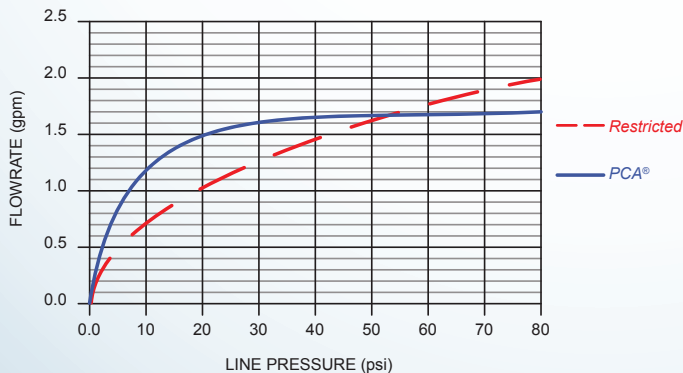

### Dimensions

No	mm	In
A	18.10	.713
B	12.60	.496
C	17.40	.685
D	≈ 11	≈ 7/16

### Housings



### Technical Data

Materials: Body Acetal  
Tip Silicone  
O-ring EPDM  
Washer EPDM  
Wetted surface area: 4651 mm<sup>2</sup>

Continuous	Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.