

## Perlator®

## Faucet Aerator - 1.8 gpm Flow Restricted Junior Size



flow, stop and go®

## Features and Benefits

- Watercolours \* design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- · Anti-clogging dome screen filters sediment and particles.
- · Available housing finishes: chrome, polished brass, & brushed nickel.
- · Roll marked with statutory marks or laser for vandal proof housings.

## Certifications

ANSI/ NSF  $^{\circ}$  -61-372 (11 678 pending)


ASME A112.18.1M and CSA B125 (11 665, 11 670, 11 680, 11 674, 11 678 pending) Meets CAL Green requirements


	Thread & I	Part Number		
	Part #	Designation	Thread Size	
TSA-18	BOINJU-N	Insert only		
TSA-18	BOMJU-N	Junior male	13/16"-27	
TSA-18	30FJU-N	Junior female	3/4"-27	
TSA-18	BODTJU-N	Junior dual thread	13/16"-27 x 3/4"-27	
TSA-18	30MJUVP-N	Junior male vandal proof	13/16″-27	
TSA-18	80FJUVP-N	Junior female vandal proof	3/4"-27	


Other product combinations available.

Packaging:	
Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Ir vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code			
Dome	Ring	Basket	
Brown	Natural	Dark Gray	

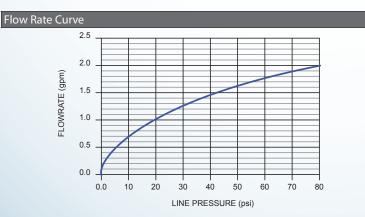





Dimensions						
No	mm	In				
Α	18.20	.717				
В	10.21	.402				
С	17.40	.685				
D	≈ 11	≈ 7/16				



Technical Data				
Materials: Body		Acetal		
	Washer	EPDM		
Continuous		Short-term (5 minutes ma Per ASME A112181 testing requirement	X.) ents.	
max. 60 max. 140		max. 70 max. 160		
°C *F	90psi 6.2bar max.	°C °F 125psi 8.5	bar nax.	