

Faucet Aerator - 2.2 gpm max SLC Dual Core Pressure Compensating Junior Size

Features and Benefits

- ▶ Smart lime build up cleaning with unique silicone bottom.
- ▶ Integrated PCA® Dual Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ More water at very low pressure (0 to approximately 22 psi) compared to conventional PCA® models.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Laser marked with statutory mark.

Certifications

ANSI/ NSF® -61-372 (12474 & 12484 pending)
ASME A112.18.1M and CSA B125 (12474 & 12484 pending)
Meets CALGreen requirements

Thread & Part Number

Part #	Designation	Thread Size
SLA-220INJU-P	Insert only	
SLA-220MJU-P	Junior male	13/16"-27
SLA-220FJU-P	Junior female	3/4"-27
SLA-220MJUVP-P	Vandal proof junior male	13/16"-27
SLA-220FJUVP-P	Vandal proof junior female	3/4"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Red	Dark Gray


Flow Rate Curve

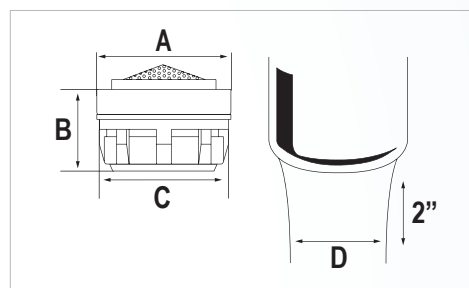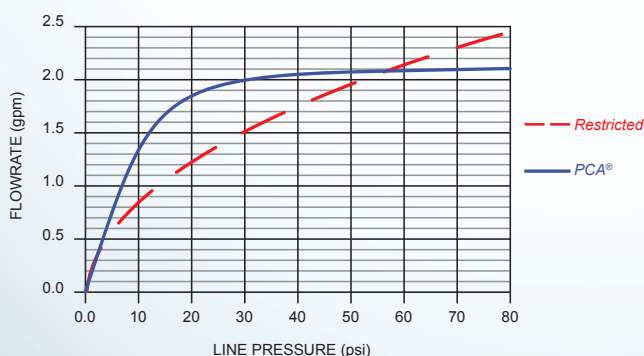

Dimensions

No	mm	In
A	18.10	.713
B	12.60	.496
C	17.40	.685
D	≈ 11	≈ 7/16

Housings

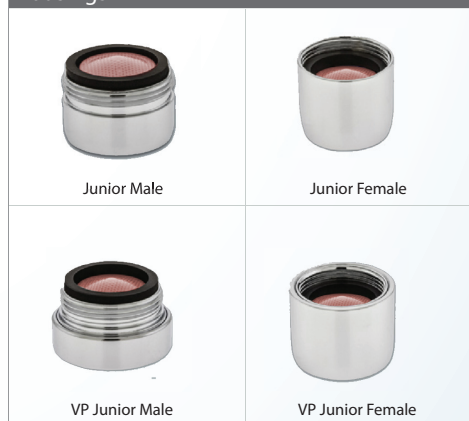

Technical Data

Materials:	Body Tip O-ring Washer	Acetal Silicone EPDM EPDM
Wetted surface area:	Continuous	4651 mm ²
		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.
	max. 60 °C max. 140 °F 90psi max. 6.2bar max.	max. 70 °C max. 160 °F 125psi max. 8.5bar max.