

Spring-Flo®

Faucet Aerator - 2.2 gpm Flow Restricted Junior Size



flow, stop and go®

Features and Benefits

- Three screen slotted aerator.
- Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- Maximizes aeration and reduces splash.
- Disassembles for easy and repeated cleaning.
- Available finish: chrome.
- Roll marked housings with statutory marks.

Certifications


ANSI/ NSF * -61-372
ASME A112.18.1M and CSA B125 (pending)

Thread & Part Number

Part #	Designation	Thread Size
TSP-220MJU-N	Junior male with tightening grooves	13/16"-27
TSP-220FJU-N	Junior female	3/4"-27

Packaging:

Jr. male/female 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

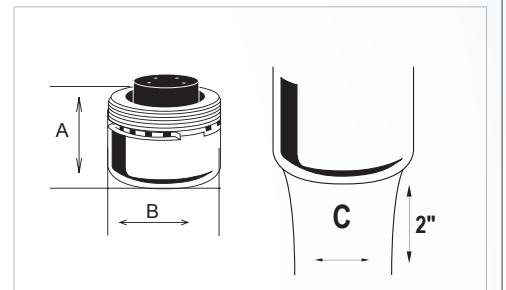


Dimensions

No	mm	In
Junior Male		
A	14.27	.562
B	20.37	.802
C	≈ 13	≈ 1/2
Junior Female		
A	19.05	.750
B	20.37	.802
C	≈ 13	≈ 1/2

Housings



Flow Rate Curve

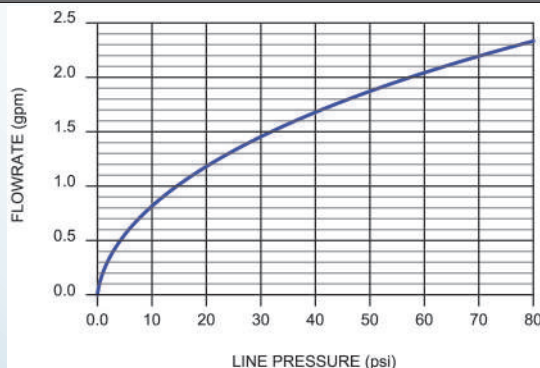

Technical Data

Materials:

Body: Brass
Washer: Santoprene
Filter Screen: Brass /Stainless Steel
Mixing Chambers: Brass

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

