

## Perlator®

### Laminar Stream - 1.5 gpm Flow Restricted Junior Size




flow, stop and go®

#### Features and Benefits

- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome, polished brass and brushed nickel.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

#### Certifications

ANSI/ NSF® -61-372 (12 878 pending)  
ASME A112.18.1M and CSA B125 (12 878 pending)  
Meets **CA Green** requirements  
WaterSense (12 878 pending)

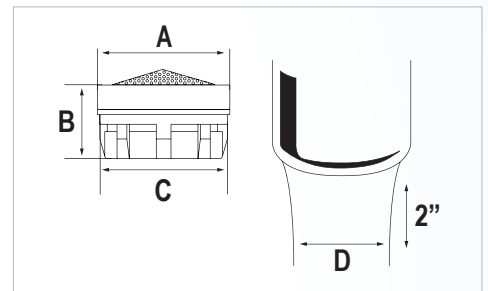

#### Thread & Part Number

Part #	Designation	Thread Size
TSL-150INJU-N	Insert only	
TSL-150MJU-N	Junior male	13/16"-27
TSL-150FJU-N	Junior female	3/4"-27
TSL-150DTJU-N	Junior dual thread	13/16"-27 x 3/4"-27
TSL-150MJUVP-N	Vandal proof junior male	13/16"-27
TSL-150FJUVP-N	Vandal proof junior female	3/4"-27
TSL-150DTJUVP-N	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.


#### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

#### Color Code

Dome	Ring	Basket
Green	White	Light Gray

#### Flow Rate Curve

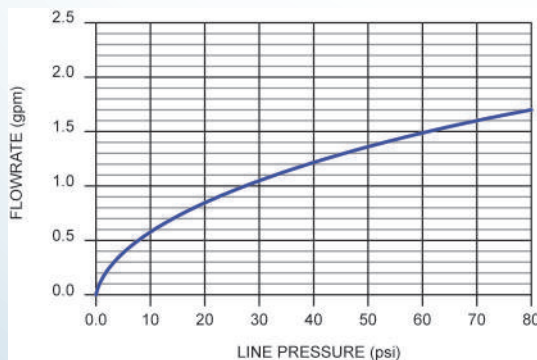

#### Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16

#### Housings



#### Technical Data

Materials: Body Acetal  
Washer EPDM

#### Continuous

max. 60 °C  
max. 140 °F

90psi max.  
6.2bar max.

#### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C  
max. 160 °F

125psi max.  
8.5bar max.