

Faucet Aerator - 1.8 gpm max Dual Core Pressure Compensating Laminar Stream Junior Size



flow, stop and go®

Features and Benefits

- Watercolours™ design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- Anti-clogging dome screen filters sediment and particles.
- Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ **Integrated PCA™ Dual Core flow regulator provides optimum stream performance.**

Certifications

ANSI/ NSF® -61-372 (11578 pending)
 ASME A112.18.1M and CSA B125 (11578 pending)
 Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
TSL-180JUIN-P	Insert only	
TSL-180JUM-P	Junior male	13/16"-27
TSL-180JUF-P	Junior female	3/4"-27
TSL-180JUDT-P	Junior dual thread	13/16"-27 x 3/4"-27
TSL-180JUMVP-P	Vandal proof junior male	13/16"-27
TSL-180JUFVP-P	Vandal proof junior female	3/4"-27
TSL-180JUDTVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Light Blue	Light Gray

Flow Rate Curve

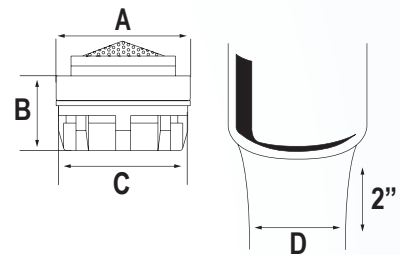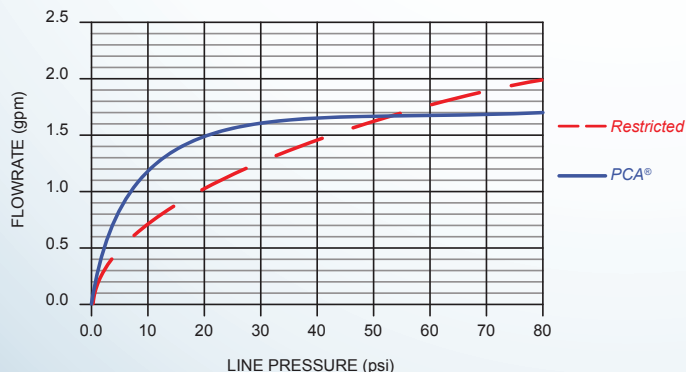

Dimensions

No	mm	In
A	18.20	.717
B	10.21	.402
C	17.40	.685
D	≈ 11	≈ 7/16


Housings



Technical Data

Materials: Body Acetal
 O-ring EPDM
 Washer EPDM

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

