

### Faucet Attachment - 0.35 gpm max Pressure Compensating Junior Size



flow, stop and go®

#### Features and Benefits

- ▶ **Unique silicone bottom for easy cleaning.**
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED® points in green buildings.

#### Certifications

ANSI/ NSF® -61-372 (17 578 pending)  
ASME A112.18.1M and CSA B125 (17 578 pending)  
Meets **CA Green** requirements

#### Thread & Part Number

Part #	Designation	Thread Size
SLS-035INJU-P	Insert only	
SLS-035MJU-P	Junior male	13/16"-27
SLS-035FJU-P	Junior female	3/4"-27
SLS-035FTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
SLS-035MJUVP-P	Vandal proof junior male	13/16"-27
SLS-035FJUVP-P	Vandal proof junior female	3/4"-27
SLS-035DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



#### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

#### Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

#### Flow Rate Curve

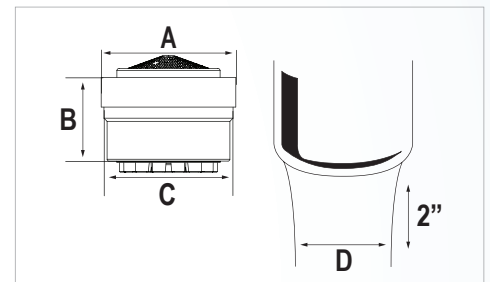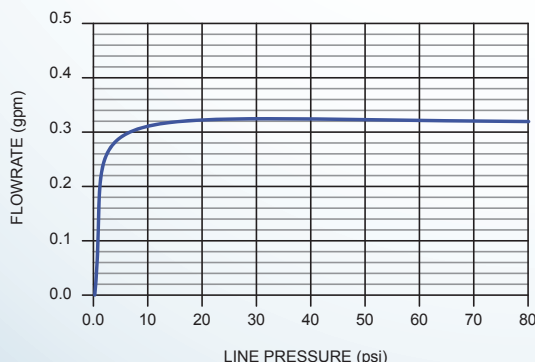

#### Dimensions

No	mm	In
A	18.2	.717
B	11.5	.453
C	17.45	.687
D	≈ 22	≈ 7/8

#### Housings



#### Technical Data

Materials: Body Acetal  
Spray Tips Silicone  
O-ring EPDM  
Washer EPDM

#### Continuous

max. 60 °C  
max. 140 °F

90psi max.  
6.2bar max.

#### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C  
max. 160 °F

125psi max.  
8.5bar max.