

## PCA® Spray

### Faucet Attachment - 0.5 gpm max Pressure Compensating Junior Size



flow, stop and go®

#### Features and Benefits

- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

#### Certifications

ANSI/ NSF® -61-372 (10 278 pending)  
ASME A112.18.1M and CSA B125 (10 278 pending)  
Meets **CALGreen** requirements

#### Thread & Part Number

Part #	Designation	Thread Size
TSS-050INJU-P	Insert only	
TSS-050MJU-P	Junior male	13/16"-27
TSS-050FJU-P	Junior female	3/4"-27
TSS-050DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
TSS-050MJUVP-P	Vandal proof junior male	13/16"-27
TSS-050FJUVP-P	Vandal proof junior female	3/4"-27
TSS-050DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



#### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

#### Color Code

Dome	Flow Regulator	Basket
Natural	Lime Green	Dark Gray


#### Flow Rate Curve

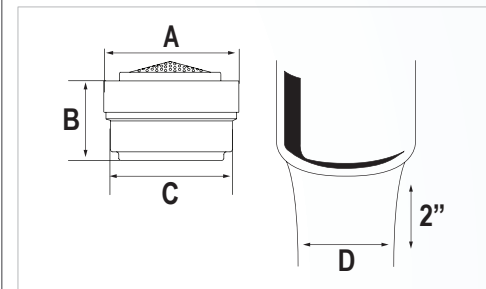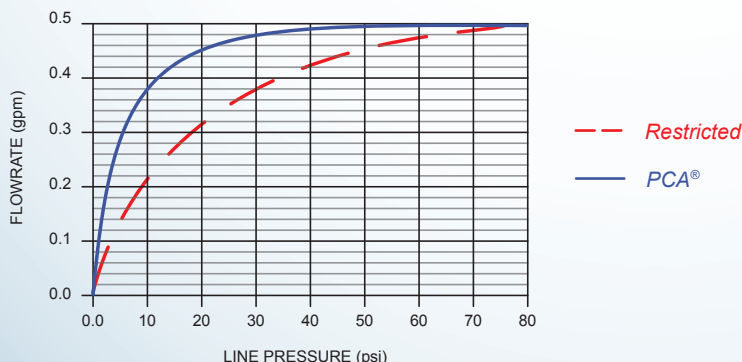

#### Dimensions

No	mm	In
A	18.20	.717
B	10.35	.407
C	16.60	.654
D	≈ 22	≈ 7/8

#### Housings

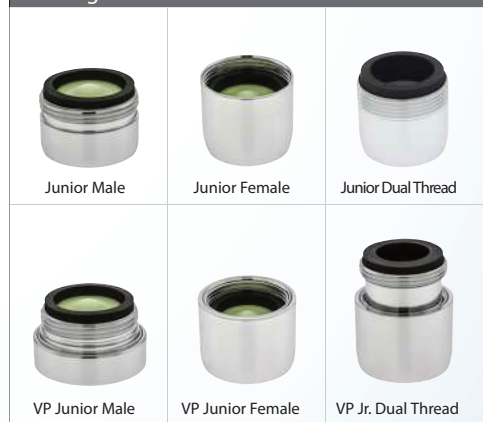

#### Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

