

PCA® SLC Spray

Faucet Attachment - 0.5 gpm max Pressure Compensating Junior Size



flow, stop and go®

Features and Benefits

- ▶ **Unique silicone bottom for easy cleaning.**
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/ NSF® -61-372 (13 778 pending)
ASME A112.18.1M and CSA B125 (13 778 pending)
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
SLS-050INJU-P	Insert only	
SLS-050MJU-P	Junior male	13/16"-27
SLS-050FJU-P	Junior female	3/4"-27
SLS-050DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
SLS-050MJUVP-P	Vandal proof junior male	13/16"-27
SLS-050FJUVP-P	Vandal proof junior female	3/4"-27
SLS-050DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/ dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread 1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

Flow Rate Curve

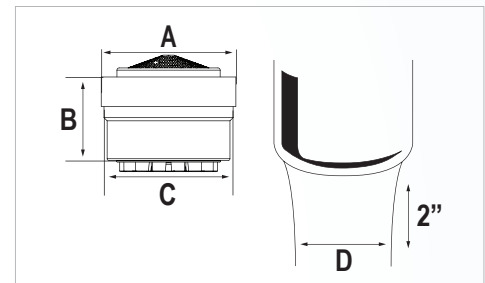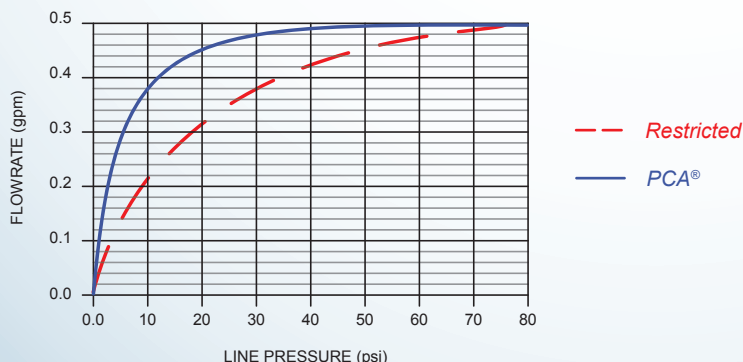

Dimensions

No	mm	In
A	18.2	.717
B	11.5	.453
C	17.45	.687
D	≈ 22	≈ 7/8

Housings



Technical Data

Materials: Body Acetal
Spray Tips Silicone
O-ring EPDM
Washer EPDM

Continuous

max. 60 °C / max. 140 °F
90psi max. / 6.2bar max.

Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C / max. 160 °F
125psi max. / 8.5bar max.