

### Faucet Attachment - 0.35 gpm max Pressure Compensating Junior Size

**NEOPERL®**

flow, stop and go®

#### Features and Benefits

- ▶ With built-in Agion™ antimicrobial product technology.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED™ points in green buildings.

#### Certifications

ANSI/NSF™ -61-372  
ASME A112.18.1M and CSA B125 (30 958)  
(30 965, 30 970, 30 980, 30 974, 30 984 pending)  
Meets **CA Green** requirements



#### Thread & Part Number

Part #	Designation	Thread Size
TCS-035INJU-P	Insert only	
TCS-035MJU-P	Junior male	13/16"-27
TCS-035FJU-P	Junior female	3/4"-27
TCS-035DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
TCS-035MJUVP-P	Vandal proof junior male	13/16"-27
TCS-035FJUVP-P	Vandal proof junior female	3/4"-27
TCS-035DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.



#### Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

#### Color Code

Dome	Flow Regulator	Basket
Light Gray	Brown	Light Gray


#### Flow Rate Curve

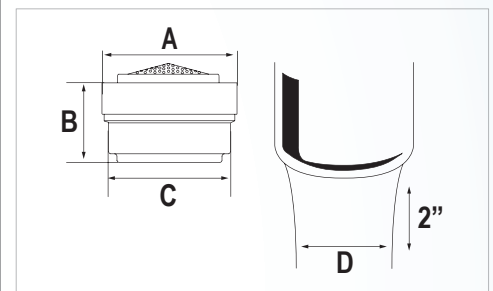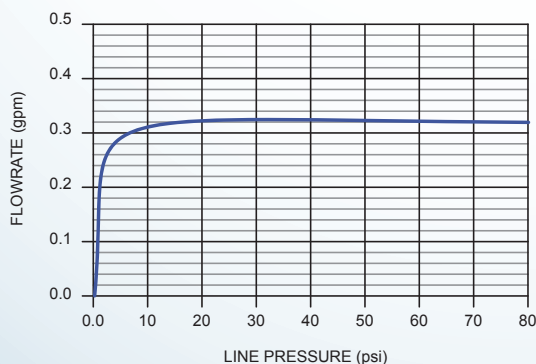

#### Dimensions

No	mm	In
A	18.20	.717
B	10.35	.407
C	16.60	.654
D	≈ 22	≈ 7/8

#### Housings

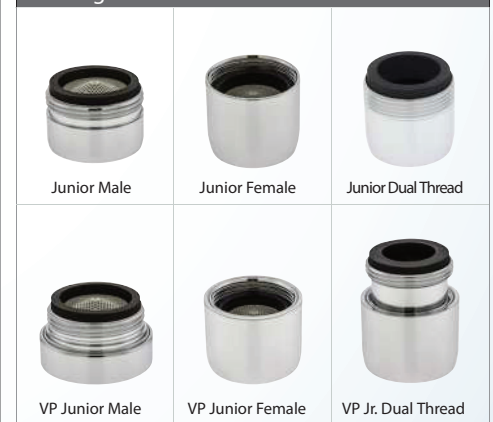

#### Technical Data

Materials: Body Acetal with Agion™  
O-ring EPDM  
Washer EPDM

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.