

Faucet Aerator - 1.2 gpm max Pressure Compensating Regular Size




flow, stop and go®

Features and Benefits

- Self cleaning anti-clogging dome screen filters and flushes out particles.
- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- Compatible with regular and vandal proof M22 & M24 metric housings.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

Certifications

ANSI/ NSF * -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense

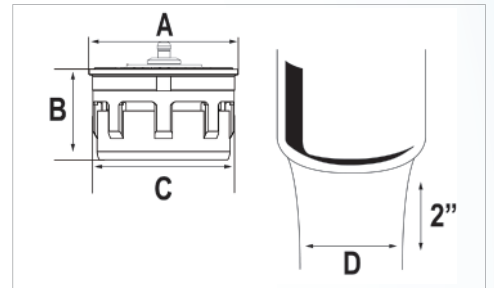

Thread & Part Number

Part #	Designation	Thread Size
TSA-120INST-PC	Insert only	
TSA-120MST-PC	Regular male	15/16"-27
TSA-120FST-PC	Regular female	55/64"-27
TSA-120DTST-PC	Regular dual thread	15/16"-27 x 55/64"-27
TSA-120MSTVP-PC	Vandal proof regular male	15/16"-27
TSA-120FSTVP-PC	Vandal proof regular female	55/64"-27
TSA-120DTSTVP-PC	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.


Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Reg. female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male	1 pc (bag), 6 pcs (clamshell), 40 pcs (tray)
Reg. female/dual thread	1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Clear	Green	Dark Gray

Flow Rate Curve

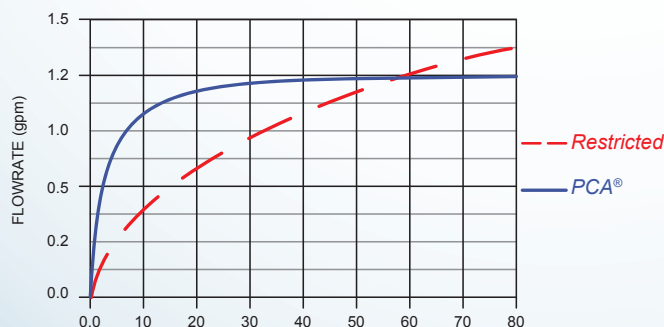

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials:	Body O-ring Washer	Acetal EPDM Silicone/EPDM
------------	--------------------------	---------------------------------

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.