

## Faucet Aerator - 1.2 gpm max Pressure Compensating Regular Size



flow, stop and go<sup>®</sup>

### Features and Benefits


- **Unique silicone bottom inhibits lime build up.**
- Watercolours<sup>™</sup> design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Unique screenless 100% plastic Cascade<sup>™</sup> construction hinders lime build-up.
- Anti-clogging dome screen filters sediment and particles.
- Compatible with regular and vandal proof M22 & M24 metric housings.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

### Certifications

ANSI/ NSF<sup>®</sup> -61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements

WaterSense

Complies with CEC Amendment to CCR Title 20, section 1605.3

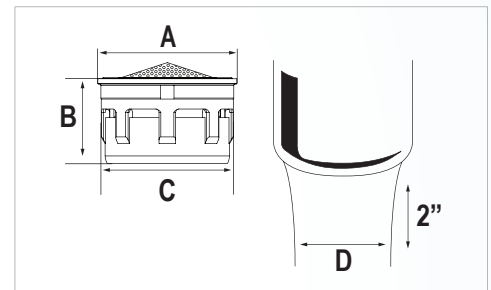

### Thread & Part Number

Part #	Designation	Thread Size
SLA-120INST-P	Insert only	
SLA-120MST-P	Regular male	15/16"-27
SLA-120FST-P	Regular female	55/64"-27
SLA-120DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
SLA-120MSTVP-P	Vandal proof regular male	15/16"-27
SLA-120FSTVP-P	Vandal proof regular female	55/64"-27
SLA-120DTSTVP-P	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.


### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)  
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Natural	Pink	Dark Gray

### Flow Rate Curve

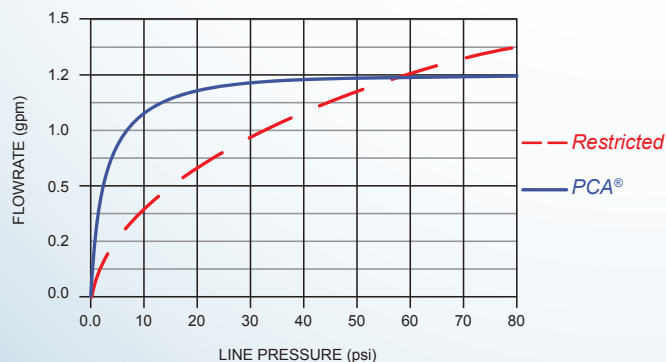

### Dimensions

No	mm	In
A	20.88	.822
B	13.55	.533
C	19.97	.786
D	≈ 13	≈ 1/2

### Housings



### Technical Data

Materials: Body Acetal  
Tip Silicone  
O-ring EPDM  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

