

Faucet Aerator - 1.8 gpm Flow Restricted Regular Size



flow, stop and go®

Features and Benefits

- Three screen slotted aerator.
- Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- Maximizes aeration and reduces splash.
- Disassembles for easy and repeated cleaning.
- Available finish: chrome.
- Roll marked housings with statutory marks.

Certifications

ANSI/ NSF * -61-372 (15 201 & 15 210 pending)
ASME A112.18.1M and CSA B125 (15 201 & 15 210 pending)
Meets **CALGreen** requirements


Thread & Part Number

Part #	Designation	Thread Size
TSP-180MST-N	Regular male with tightening grooves	15/16"-27
TSP-180FST-N	Regular female	55/64"-27
TSP-180DTST-N	Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.

Packaging:

Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

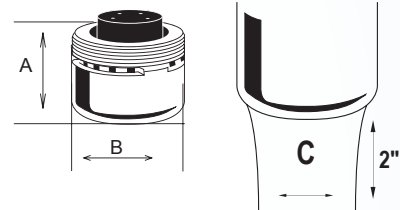


Dimensions

No	mm	In
Regular Male		
A	14.40	.567
B	23.50	.925
C	≈ 13	≈ 1/2
Regular Female & Dual Thread		
A	18.54	.730
B	23.50	.925
C	≈ 13	≈ 1/2

Housings



Flow Rate Curve

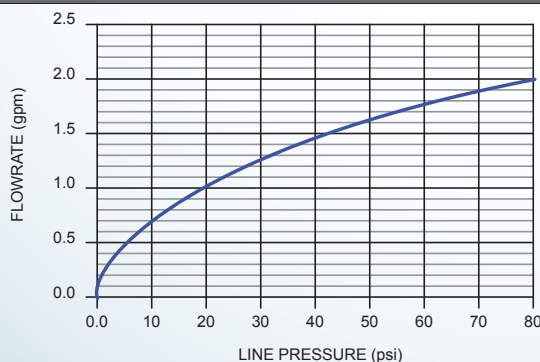

Technical Data

Materials:

Body	Brass
Washer	Santoprene
Filter Screen	Brass /Stainless Steel
Mixing Chambers	Brass

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

