

Faucet Aerator - 1.8 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

Features and Benefits

- One piece construction.
- Slotted design.
- Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- Maximizes aeration and reduces splash.
- Disassembles for easy and repeated cleaning.
- Available finish: chrome.
- Roll marked housings with statutory marks.

Certifications

ANSI/ NSF * -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements



Thread & Part Number

| Part # | Designation | Thread Size |
|----------------|--------------------------------------|-----------------------|
| TSPU-180MST-P | Regular male with tightening grooves | 15/16"-27 |
| TSPU-180FST-P | Regular female | 55/64"-27 |
| TSPU-180DTST-P | Regular dual thread | 15/16"-27 x 55/64"-27 |

Packaging:

Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)


Flow Rate Curve

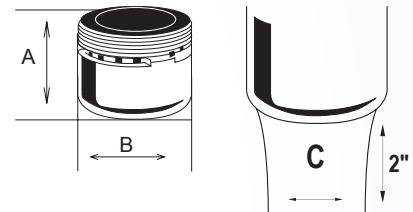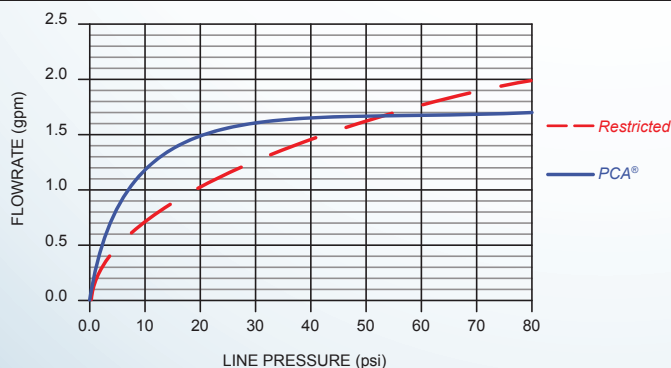

Dimensions

| No | mm | In |
|---|-------|-------|
| Regular Male | | |
| A | 14.40 | .567 |
| B | 23.50 | .925 |
| C | ≈ 13 | ≈ 1/2 |
| Regular Female & Dual Thread | | |
| A | 18.54 | .730 |
| B | 23.49 | .925 |
| C | ≈ 13 | ≈ 1/2 |

Housings

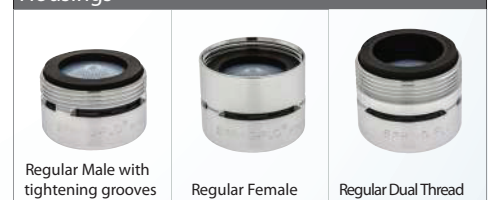

Technical Data

Materials:

Body Acetal
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

