

Spring-Flo® Ultra

Faucet Aerator - 2.2 gpm Flow Restricted Regular Size



flow, stop and go®

Features and Benefits

- One piece construction.
- Slotted design.
- Creates a smooth stream of water, fully aerated with a unique air intake through side slots.
- Maximizes aeration and reduces splash.
- Disassembles for easy and repeated cleaning.
- Available finish: chrome.
- Roll marked housings with statutory marks.

Certifications


ANSI/ NSF * -61-372 (15 100 pending)
ASME A112.18.1M and CSA B125 (pending)

Thread & Part Number

| Part # | Designation | Thread Size |
|----------------|--------------------------------------|-----------------------|
| TSPU-220MST-N | Regular male with tightening grooves | 15/16"-27 |
| TSPU-220FST-N | Regular female | 55/64"-27 |
| TSPU-220DTST-N | Regular dual thread | 15/16"-27 x 55/64"-27 |

Packaging:

Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)

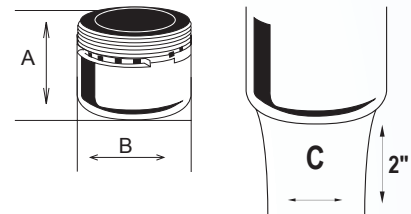

Dimensions

| No | mm | In |
|------------------------------|-------|-------|
| Regular Male | | |
| A | 14.40 | .567 |
| B | 23.50 | .925 |
| C | ≈ 13 | ≈ 1/2 |
| Regular Female & Dual Thread | | |
| A | 18.54 | .730 |
| B | 23.49 | .925 |
| C | ≈ 13 | ≈ 1/2 |


Housings




Technical Data

Materials: Body Acetal
Washer EPDM

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.



Flow Rate Curve

