

Perlator Clinic

Laminar Stream - 1.5 gpm Flow Restricted Regular Size




flow, stop and go®

Features and Benefits

- ▶ Available in 4 color baskets to quickly monitor scheduled maintenance period replacement.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finish: chrome.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/ NSF * -61-372 (pending)
ASME A112.18.1M and CSA B125 (pending)
Meets **CA Green** requirements
WaterSense (pending)

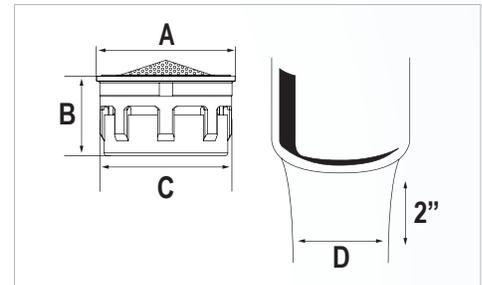

Thread & Part Number

Part #	Designation	Thread Size
TSLC-150INSTY-N	Insert only - yellow	
TSLC-150DTSTY-N	Short dual thread	15/16"-27 x 55/64"-27
TSLC-150INSTG-N	Insert only - green	
TSLC-150DTSTG-N	Short dual thread	15/16"-27 x 55/64"-27
TSLC-150INSTB-N	Insert only - blue	
TSLC-150DTSTB-N	Short dual thread	15/16"-27 x 55/64"-27
TSLC-150INSTR-N	Insert only - red	
TSLC-150DTSTR-N	Short dual thread	15/16"-27 x 55/64"-27

Other product combinations available.


Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. short dual thread 1 pc (bag), 50 pcs (bag)

Color Code

Dome	Ring	Basket
Green	Green	Blue, Yellow, Red, Green


Flow Rate Curve

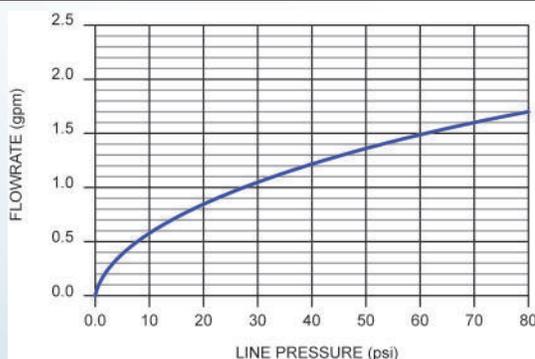

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings

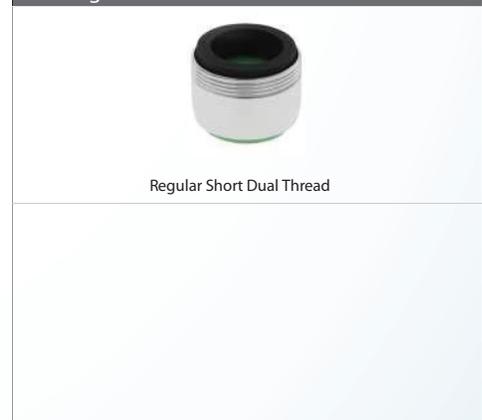

Technical Data

Materials: Body Acetal
Washer EPDM

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.