

PCA® CareGuard

NEOPERL[®]

flow, stop and go®

Laminar Stream - 1.5 gpm max Pressure Compensating Regular Size

Features and Benefits

- With built-in Agion * antimicrobial product technology.
- Watercolours * design: Color coding to identify flow rate and stream pattern.
- Provides a splash-free, crystal clear (non-aerated) stream.
- Unique screenless 100% plastic Cascade * construction hinders lime build up.
- Pressure compensating for constant flow from 20 to 80 psi.
- Recommended for use in healthcare facilities to prevent mixing air and water.
- Compatible with regular and vandal proof M22 & M24 metric housings.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

Certifications

ANSI/NSF *-61-372

ASME A112.18.1M and CSA B125 (31 435, 21 400, 31 410, 31 404, 31 414 pending)

Meets CAL Green requirements

WaterSense (31 435, 21 400, 31 410, 31 404, 31 414 pending)






	Thread & Part Number				
	Part #	Designation	Thread Size		
TCL-150INST-P		Insert only			
TCL-150MST-P		Regular male	15/16″-27		
TCL-150FST-P		Regular female	55/64"-27		
TCL-150DTST-P		Regular dual thread	15/16"-27 x 55/64"-27		
TCL-150MSTVP-P		Vandal proof regular male	15/16″-27		
TCL-150FSTVP-P		Vandal proof regular female	55/64"-27		
TCL-150DTSTVP-P		Vandal proof regular dual thread	15/16"-27 x 55/64"-27		

Other product combinations available.


_				
Pa	cks	ine	na	۰

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread	1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code					
Dome	Flow Regulator	Basket			
Light Gray	Green	Light Gray			

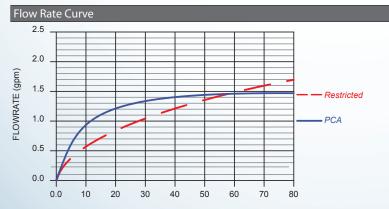





Dimensions					
No	mm	In			
Α	20.93	.824			
В	11.95	.470			
C	20.00	.787			
D	≈ 13	≈ 1/2			



