

Faucet Attachment - 0.35 gpm max Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- ▶ **Distinguished stream with delicate lines and a unique spray pattern.**
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372 (32 310 & 32 314 pending)
ASME A112.18.1M and CSA B125 (32 310 & 32 314 pending)
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
TSM-035INST-P	Insert only	
TSM-035MST-P	Regular male	15/16"-27
TSM-035FST-P	Regular female	55/64"-27
TSM-035DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
TSM-035MSTVP-P	Vandal Proof Regular male	15/16"-27
TSM-035FSTVP-P	Vandal Proof Regular female	55/64"-27
TSM-035DTSTVP-P	Vandal Proof Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

Flow Rate Curve

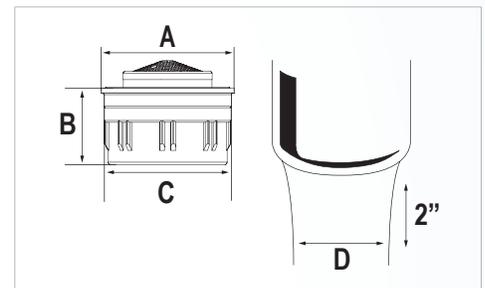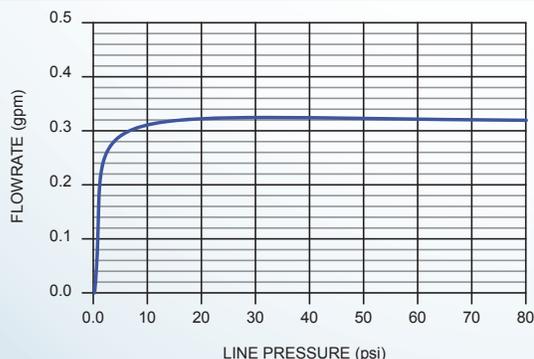

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.