

Faucet Attachment - 0.35 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

Features and Benefits

- ▶ **Unique silicone bottom for easy cleaning.**
- ▶ Watercolours ® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED ® points in green buildings.

Certifications

ANSI/ NSF ® -61-372

ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
SLS-035INST-P	Insert only	
SLS-035MST-P	Regular male	15/16"-27
SLS-035FST-P	Regular female	55/64"-27
SLS-035DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
SLS-035MSTVP-P	Vandal proof regular male	15/16"-27
SLS-035FSTVP-P	Vandal proof regular female	55/64"-27
SLS-035DTSTVP-P	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread	1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

Flow Rate Curve

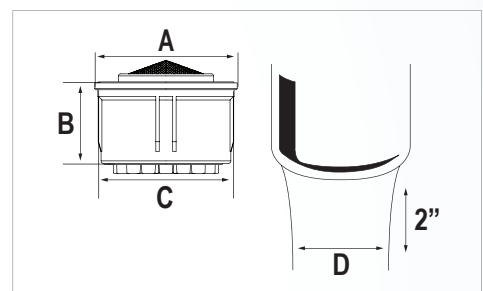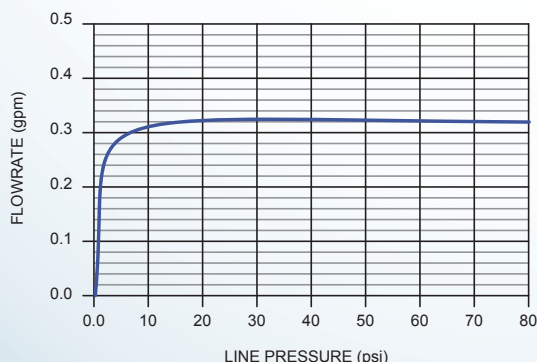

Dimensions

No	mm	In
A	20.85	.821
B	12.00	.472
C	19.95	.785
D	≈ 25	≈ 1


Housings



Technical Data

Materials:	Body	Acetal
	Spray Tips	Silicone
	O-ring	EPDM
	Washer	EPDM

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

