

Faucet Attachment - 0.35 gpm max Pressure Compensating Regular Size



flow, stop and go[®]

Features and Benefits

- ▶ Watercolours[™] design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED[™] points in green buildings.

Certifications

ANSI/ NSF[™] -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements

Thread & Part Number

| Part # | Designation | Thread Size |
|-----------------|----------------------------------|-----------------------|
| TSS-035INST-P | Insert only | |
| TSS-035MST-P | Regular male | 15/16"-27 |
| TSS-035FST-P | Regular female | 55/64"-27 |
| TSS-035DTST-P | Regular dual thread | 15/16"-27 x 55/64"-27 |
| TSS-035MSTVP-P | Vandal proof regular male | 15/16"-27 |
| TSS-035FSTVP-P | Vandal proof regular female | 55/64"-27 |
| TSS-035DTSTVP-P | Vandal proof regular dual thread | 15/16"-27 x 55/64"-27 |

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

| Dome | Flow Regulator | Basket |
|---------|----------------|-----------|
| Natural | Brown | Dark Gray |

Flow Rate Curve

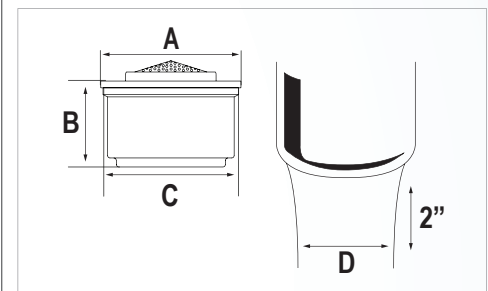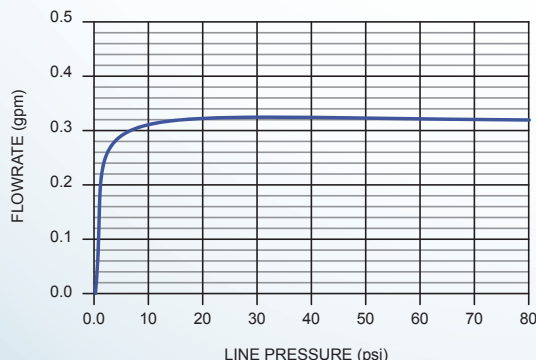

Dimensions

| No | mm | In |
|----|-------|------|
| A | 20.85 | .821 |
| B | 13.00 | .512 |
| C | 19.95 | .785 |
| D | ≈ 25 | ≈ 1 |

Housings



Technical Data

Materials: Body Acetal
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

