

## PCA® ITR Spray

### Faucet Attachment - 1.2 gpm max Pressure Compensating Regular Size

**NEOPERL®**

flow, stop and go®

#### Features and Benefits

- ▶ Full size non-aerated spray (Rain Spray) with soft water stream.
- ▶ Unique silicone bottom for easy cleaning.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

#### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements  
WaterSense



#### Options Available

Part #	Designation	Thread Size
TSSR-120INST-P	Insert only	
TSSR-120MST-P	Regular male	15/16"-27
TSSR-120FST-P	Regular female	55/64"-27
TSSR-120DTST-P	Regular dual thread	55/16"-27 x 55/64"-27
TSSR-120MSTVP-P	Vandal proof regular male	15/16"-27
TSSR-120FSTVP-P	Vandal proof regular female	55/64"-27

Other product combinations available.



#### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)  
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

#### Color Code

Dome	Flow Regulator	Basket
Natural	Pink	Dark Gray

#### Flow Rate Curve

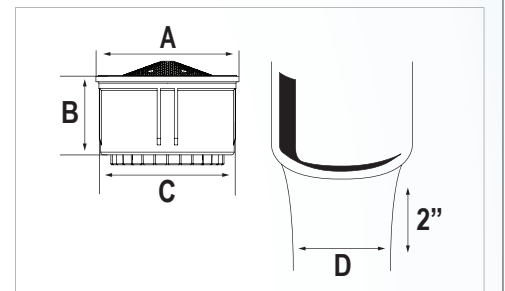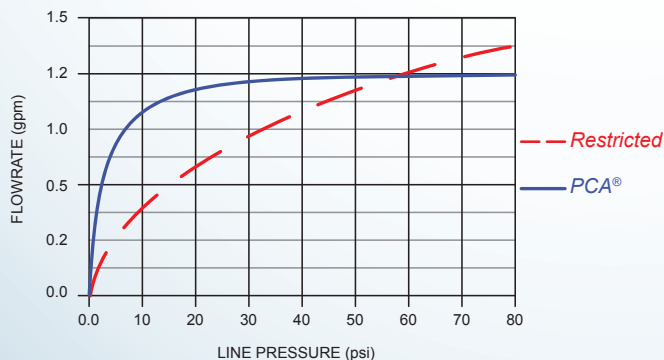

#### Dimensions

No	mm	In
A	20.85	.821
B	11.45	.451
C	19.97	.786
D	≈ 32	≈ 1 1/4

#### Housings



#### Technical Data

Materials: Body Acetal  
Spray tips Silicone  
O-ring EPDM  
Washer EPDM

#### Continuous

max. 60 °C max. 140 °F  
90psi max. 6.2bar max.

#### Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C max. 160 °F  
125psi max. 8.5bar max.