

## Faucet Attachment - 1.2 gpm max Pressure Compensating Regular Size

**NEOPERL®**

flow, stop and go®

### Features and Benefits

- ▶ Full size non-aerated spray (Rain Spray) with soft water stream.
- ▶ Unique silicone bottom for easy cleaning.
- ▶ Adjustable bottom to angle the direction of your stream.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marking.

### Certifications

ANSI/ NSF® -61-372

ASME A112.18.1M and CSA B125

Meets **CALGreen** requirements

WaterSense

Complies with CEC Amendment to CCR Title 20, section 1605.3



### Thread & Part Number

| Part #           | Designation                 | Thread Size           |
|------------------|-----------------------------|-----------------------|
| TSSR-120INST-PD  | Insert only                 |                       |
| TSSR-120MST-PD   | Regular male                | 15/16"-27             |
| TSSR-120FST-PD   | Regular female              | 55/64"-27             |
| TSSR-120DTST-PD  | Regular dual thread         | 15/16"-27 x 55/64"-27 |
| TSSR-120MSTVP-PD | Vandal proof regular male   | 15/16"-27             |
| TSSR-120FSTVP-PD | Vandal proof regular female | 55/64"-27             |

Other product combinations available.



### Packaging:

|   |   |
|---|---|
| Inserts                                   | 1 pc (bag), 6 pcs (bag), 50 pcs (bag)   |
| Reg. male/female/dual thread              | 1 pc (bag), 6 pcs (tube), 50 pcs (tray) |
| Reg. vandal proof male/female/dual thread | 1 pc (bag), 6 pcs (tube), 40 pcs (tray) |

### Color Code

| Dome    | Flow Regulator | Basket    |
|---------|----------------|-----------|
| Natural | Pink           | Dark Gray |

### Flow Rate Curve

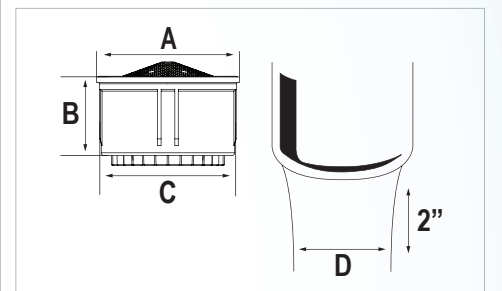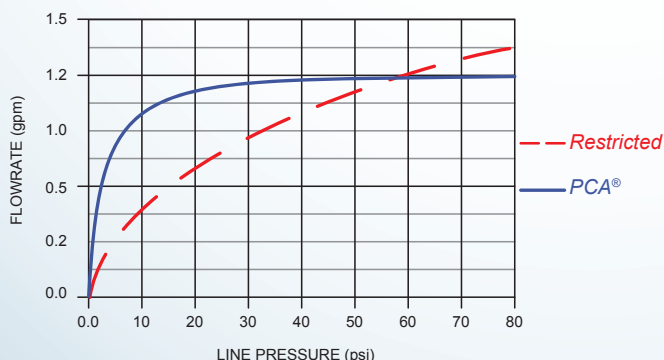

### Dimensions

| No | mm    | In      |
|----|-------|---------|
| A  | 20.85 | .821    |
| B  | 11.45 | .451    |
| C  | 19.97 | .786    |
| D  | ≈ 32  | ≈ 1 1/4 |

### Housings



### Technical Data

|            |  |                                    |
|------------|--|------------------------------------|
| Materials: | Body<br>Spray tips<br>O-ring<br>Washer | Acetal<br>Silicone<br>EPDM<br>EPDM |
|------------|--|------------------------------------|

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

