

PCA Faucet Attachment - 0.35 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

Features and Benefits

- ▶ With built-in Agion™ antimicrobial product technology.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED™ points in green buildings.

Certifications

ANSI/NSF A-112.18.1M

ASME A112.18.1M and CSA B125 (all pending except 30 926)

Meets **CA Green** requirements



Thread & Part Number

Part #	Designation	Thread Size
TCS-035INST-P	Insert only	
TCS-035MST-P	Regular male	15/16"-27
TCS-035FST-P	Regular female	55/64"-27
TCS-035DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
TCS-035MSTVP-P	Vandal proof regular male	15/16"-27
TCS-035FSTVP-P	Vandal proof regular female	55/64"-27
TCS-035DTSTVP-P	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread	1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Light Gray	Brown	Light Gray

Flow Rate Curve

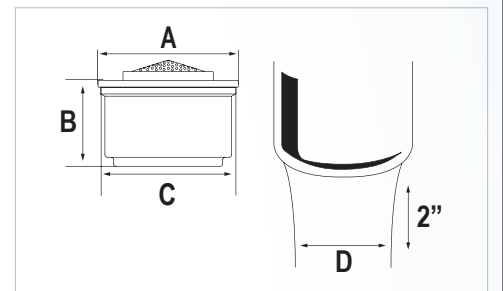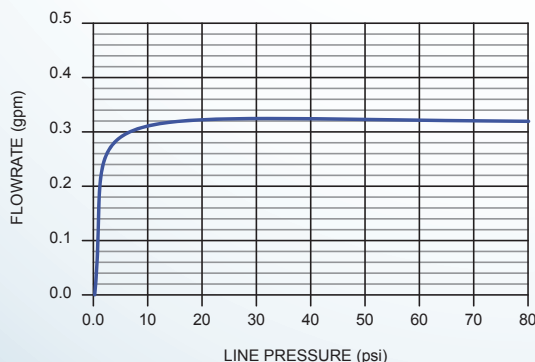

Dimensions

No	mm	In
A	20.87	.822
B	13.00	.512
C	19.95	.785
D	≈ 25	≈ 1


Housings



Technical Data

Materials:	Body O-ring Washer	Acetal with Agion™ EPDM EPDM
------------	--------------------------	------------------------------------

Continuous



Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

