

Spray CareGuard

Faucet Attachment - 0.5 gpm max Pressure Compensating Junior Size




flow, stop and go®

Features and Benefits

- ▶ With built-in Agion™ antimicrobial product technology.
- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Roll marked with statutory marks or laser for vandal proof housings.

Certifications

ANSI/NSF® -61-372 (14 078 pending)
ASME A112.18.1M and CSA B125 (14 078 pending)
Meets **CALGreen** requirements

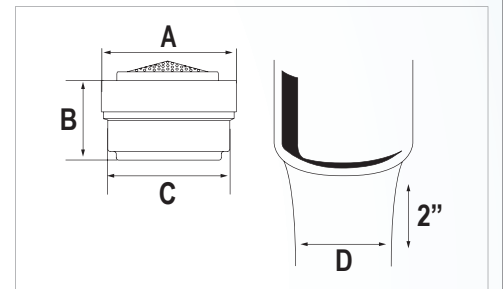

Thread & Part Number

Part #	Designation	Thread Size
TCS-050INJU-P	Insert only	
TCS-050MJU-P	Junior male	13/16"-27
TCS-050FJU-P	Junior female	3/4"-27
TCS-050DTJU-P	Junior dual thread	13/16"-27 x 3/4"-27
TCS-050MJUVP-P	Vandal proof junior male	13/16"-27
TCS-050FJUVP-P	Vandal proof junior female	3/4"-27
TCS-050DTJUVP-P	Vandal proof junior dual thread	13/16"-27 x 3/4"-27

Other product combinations available.


Packaging:

Inserts	1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Jr. male/female/dual thread	1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Jr. vandal proof dual thread	1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)
Jr. vandal proof male/female	1 pc (bag), 6 pcs (tube), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Light Gray	Lime Green	Light Gray


Flow Rate Curve

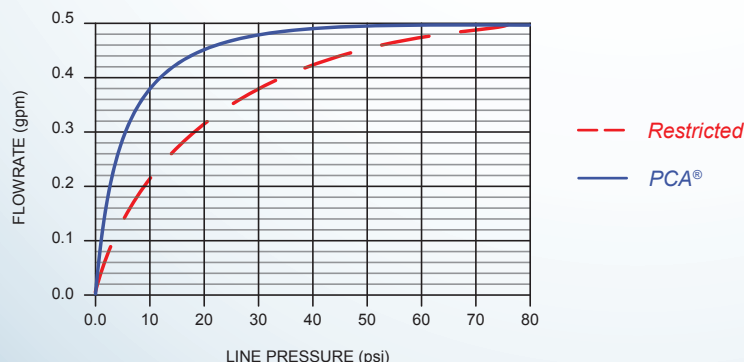

Dimensions

No	mm	In
A	18.2	.717
B	10.35	.407
C	17.45	.687
D	≈ 22	≈ 7/8

Housings

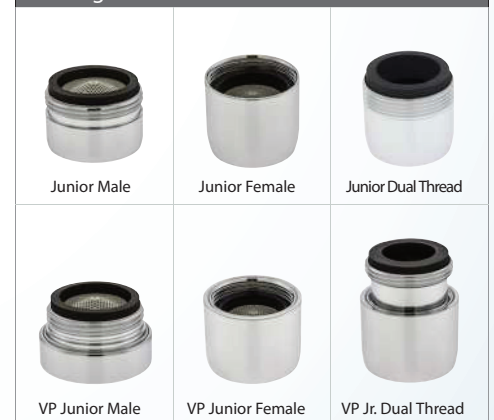

Technical Data

Materials: Body Acetal with Agion™
O-ring EPDM
Washer EPDM

Continuous

max. 60 °C
max. 140 °F
90psi max.
6.2bar max.

Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C
max. 160 °F
125psi max.
8.5bar max.