

## PCA® Perlator®

### Faucet Aerator - 1.2 gpm max Pressure Compensating Tom Thumb® Size



flow, stop and go®

#### Features and Benefits

- Watercolours™ design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- Anti-clogging dome screen filters sediment and particles.
- Available housing finishes: chrome.
- Roll marked with statutory marks.

#### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements  
WaterSense  
Complies with CEC Amendment to CCR Title 20, section 1605.3



#### Thread & Part Number

Part #	Designation	Thread Size
TSA-120INTT-P	Insert only	
TSA-120MTT-P	Tom thumb® male	M18 x 1
TSA-120FTT-P	Tom thumb® female	M16 x 1

Other product combinations available.




#### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Tom Thumb® male/female 1 pc (bag), 50 pcs (tray)

#### Color Code

Dome	Flow Regulator	Basket
Clear	Pink	Dark Gray

#### Flow Rate Curve

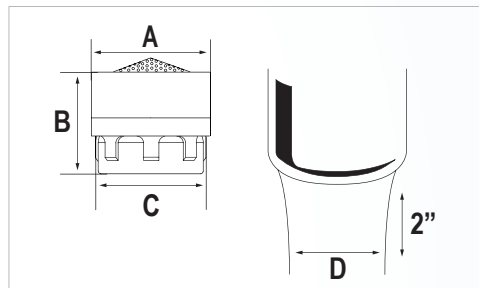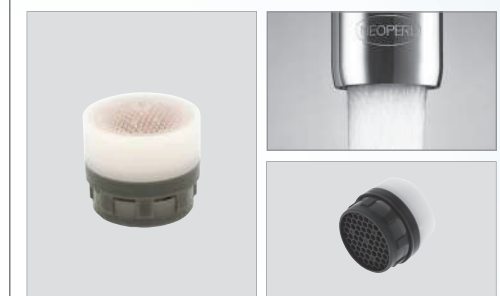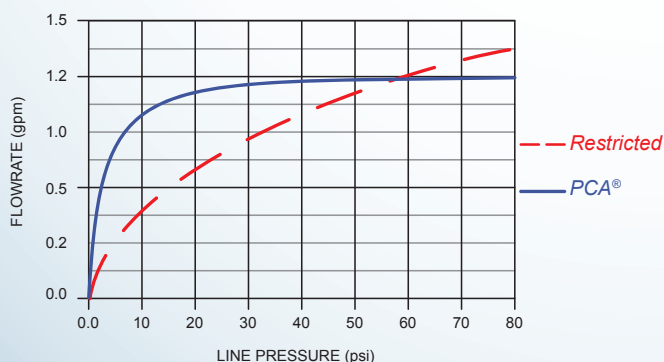

#### Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 9	≈ 3/8

#### Housings



Tom Thumb® Male



Tom Thumb® Female

#### Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer NBR

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

