

## Faucet Aerator - 1.8 gpm max Pressure Compensating Tom Thumb® Size



flow, stop and go®

### Features and Benefits

- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime buildup.
- Anti-clogging dome screen filters sediment and particles.
- Available housing finishes: chrome.
- Roll marked with statutory marks.

### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements

### Thread & Part Number

Part #	Designation	Thread Size
TSA-180INTT-P	Insert only	
TSA-180MTT-P	Tom Thumb® male	M18x1
TSA-180FTT-P	Tom Thumb® female	M16x1

Other product combinations available.



### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Tom Thumb® male/female 1 pc (bag), 50 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Clear	Light Blue	Dark Gray


### Flow Rate Curve

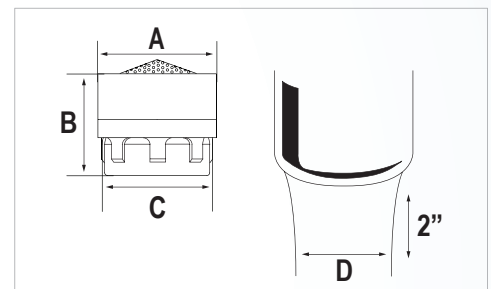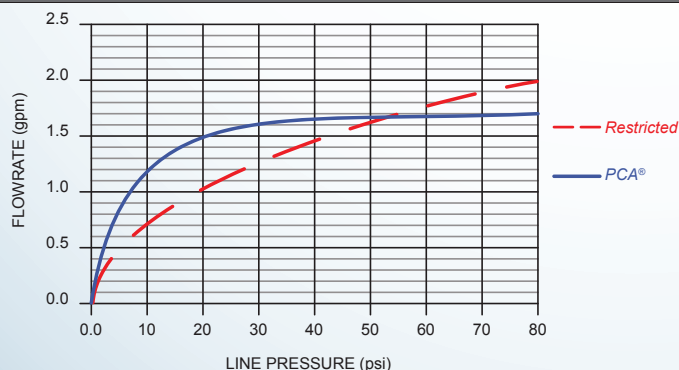

### Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 9	≈ 3/8

### Housings

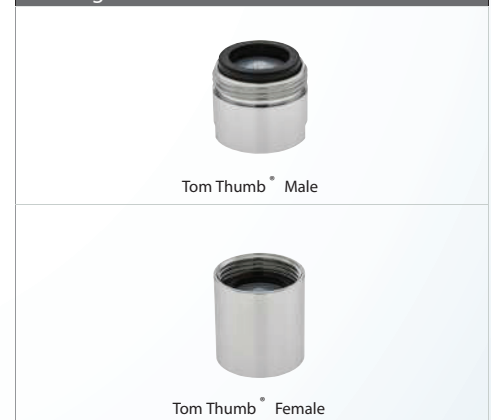

### Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer NBR

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.