

PCA® Spray

Faucet Attachment - 0.5 gpm max Pressure Compensating Tom Thumb® Size

NEOPERL®

flow, stop and go®

Features and Benefits

- ▶ Watercolours™ design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome.
- ▶ Roll marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
TSS-050INTT-P	Insert only	
TSS-050MTT-P	Tom Thumb® male	M18x1
TSS-050FTT-P	Tom Thumb® female	M16x1

Other product combinations available.




Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Tom Thumb® male/female 1 pc (bag), 50 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Clear	Lime Green	Dark Gray


Flow Rate Curve

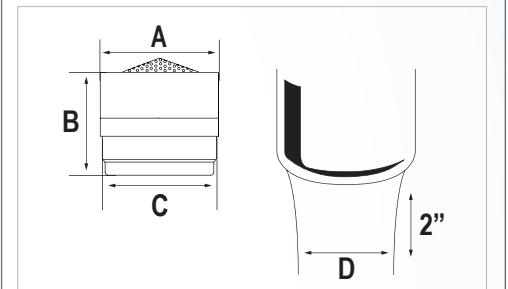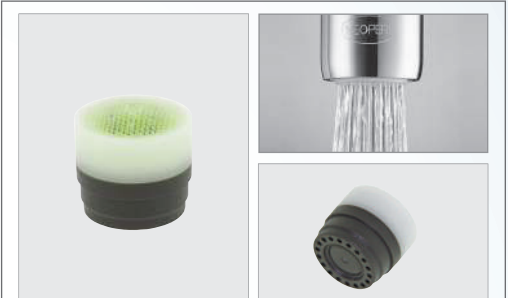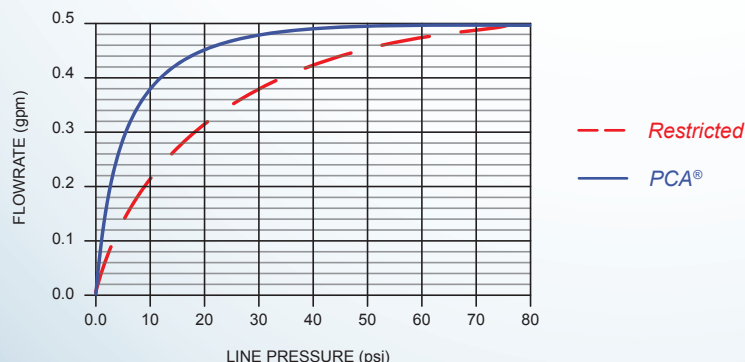

Dimensions

No	mm	In
A	15.00	.591
B	12.95	.510
C	14.05	.553
D	≈ 16	≈ 5/8

Housings

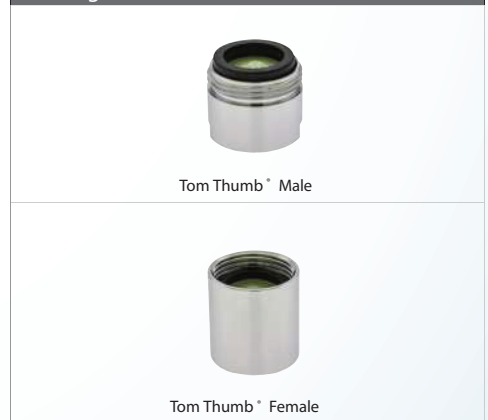

Technical Data

Materials: Body Acetal
O-ring EPDM
Washer NBR

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

