

Tub Filler

Laminar Stream - Full Flow Neostrahl® Regular Size



flow, stop and go®

Features and Benefits

- ▶ Screenless construction.
- ▶ Provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: unplated, chrome, and PVD.
- ▶ Laser marked housings: custom logo and/or statutory marks.

Certifications

ANSI/NSF ® -61-372

Options Available



Part #	Designation
TFL-INST-N	Insert only
TFL-MST-N	Regular Male 15/16" -27
TFL-FST-N	Regular Female 55/64" -27

- WSA applies to insert only

Color Code

Dome: N/A	Diffuser: N/A	Basket: N/A
-----------	---------------	-------------

Flow Rate Curve

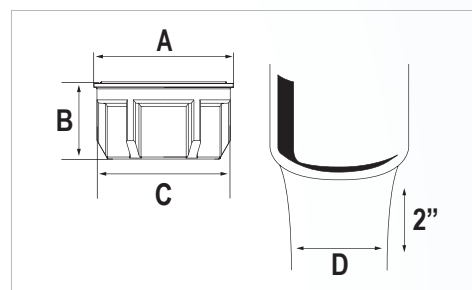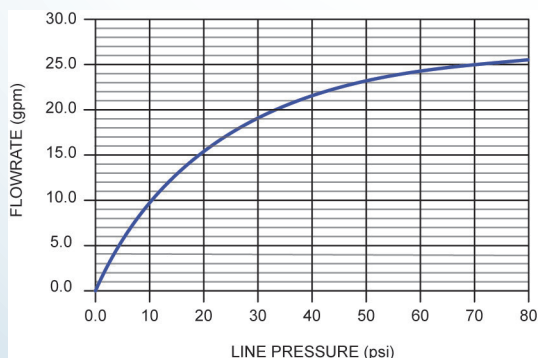

Dimensions

No	mm	In
A	20.80	.819
B	11.35	.447
C	19.95	.785
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials: Body Acetal
Washer EPDM
Wetted surface area: 1613 mm²

Continuous		Short-term (5 minutes max.) Per ASME A112.181 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.