

PCA Dual Stream

Faucet Attachment - 1.5 gpm max Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- ▶ Rotate sleeve in either direction to easily switch from a pleasantly aerated stream to an effective spray stream.
- ▶ Integrated PCA® Dual-Core flow regulator provides optimum stream performance.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Optional innovative anti-twist swivel adapter with 25° swivel angle.

Certifications

ANSI/ NSF® -61-372 (pending)
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
TDS-150FST-P	Regular female	55/64"-27
TDS-150DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
DSV-150FST-P	Regular female w/swivel adapter	55/64"-27
DSV-150MST-P	Regular female w/male adapter	15/16"


Packaging:

Reg. female/dual thread 1 pc (bag), 6 pcs (clamshell), 50 pcs (tray)


Color Code

Dome	Flow Regulator	Basket
Natural	Green	Dark Gray


Flow Rate Curve

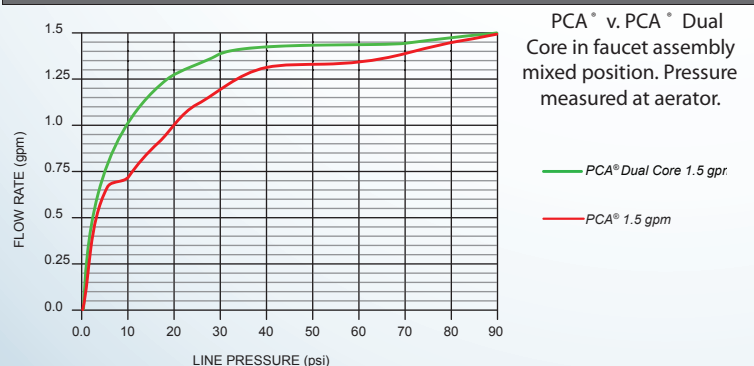

Dimensions

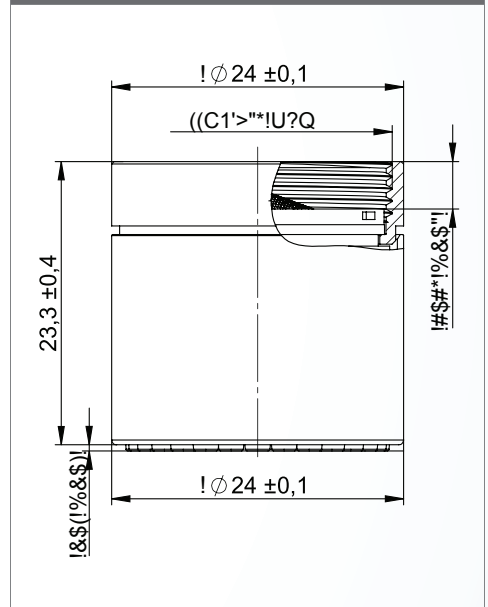

Housings

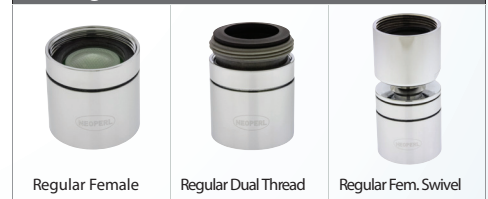

Technical Data

Materials: Body Chrome-plated brass & POM
Washer EPDM /NBR

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.