

Hidden Faucet Aerator - 1.0 to 2.2 gpm Pressure Compensating Junior Size M21.5x1



flow, stop and go®

Features and Benefits

- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Anti-clogging dome screen filters sediment and particles.
- Threads directly into the faucet spout. Virtually invisible once installed.
- Vandal resistant by design (install and remove with a special key).

Certifications

ANSI/ NSF® -61-372

ASME A112.18.1M and CSA B125 (2.2 gpm pending)

Meets **CA/Green** requirements (1.0, 1.2, 1.5, & 1.8 gpm)

WaterSense (1.0, 1.2, & 1.5 gpm)

1.8 & 2.2 gpm not applicable for WaterSense

Complies with CEC Amendment to CCR Title 20, section 1605.3 (1.2 & 1.8 gpm)



Options Available


Part #	Color	gpm	L/min
CCA-100JU-P	Blue / Dark Gray	1.0	3.8
CCA-120JU-P	Pink / Dark Gray	1.2	4.5
CCA-150JU-P	Green / Dark Gray	1.5	5.7
CCA-180JU-P	Light Blue / Dark Gray	1.8	6.6
CCA-220JU-P	Yellow / Dark Gray	2.2	8.3
CCT-050	Caché® Key (Red)		

Packaging:

Threaded Insert 1 pc (bag), 6 pcs (bag), 50 pcs (bag)


Technical Data

Materials:	Body	Acetal
	Int. O-ring	EPDM
	Ext. O-ring	Silicone

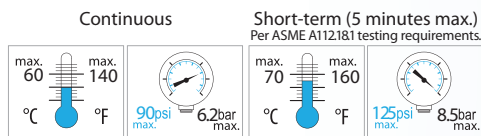

Dimensions

Mounting Dimensions

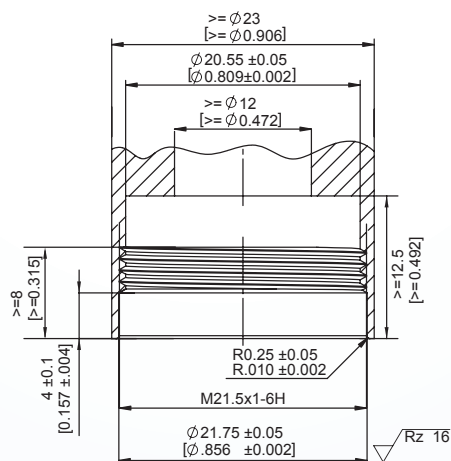

Dimensions

