

Faucet Aerator - 1.8 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

Features and Benefits

- **Unique silicone bottom inhibits lime build up.**
- Watercolours® design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Unique screenless 100% plastic Cascade® construction hinders lime build-up.
- Anti-clogging dome screen filters sediment and particles.
- Compatible with regular and vandal proof M22 & M24 metric housings.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
SLA-220INST-P	Insert only	
SLA-220MST-P	Regular male	15/16"-27
SLA-220FST-P	Regular female	55/64"-27
SLA-220DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
SLA-220MSTVP-P	Pandal proof regular male	15/16"-27
SLA-220FSTVP-P	Vandal proof regular female	55/64"-27
SLA-220DTSTVP-P	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Light Blue	Dark Gray

Flow Rate Curve

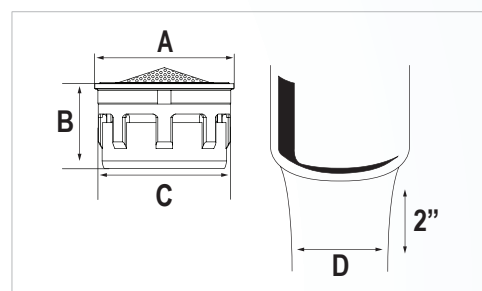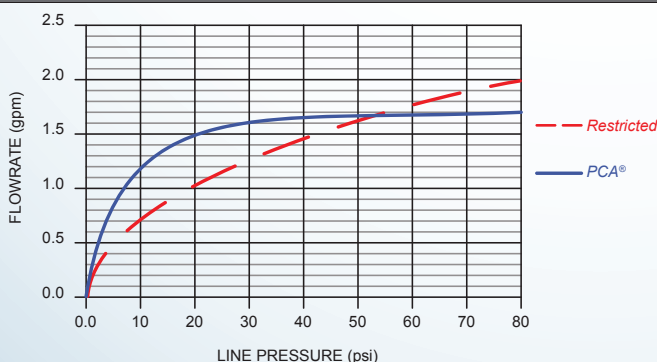

Dimensions

No	mm	In
A	20.88	.822
B	13.55	.533
C	19.97	.786
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials: Body Acetal
Tip Silicone
O-ring EPDM
Washer EPDM

Continuous

max. 60 °C max. 140 °F
90psi max. 6.2bar max.

Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.

max. 70 °C max. 160 °F
125psi max. 8.5bar max.