

## Faucet Aerator - 2.2 gpm max Pressure Compensating Regular Size

NEOPERL®

flow, stop and go®

### Features and Benefits

- **Adjustable bottom to angle the direction of your stream.**
- Watercolours™ design: Color coding to identify flow rate and stream pattern.
- Patented construction provides a splash-free stream, well-aerated and soft to the touch.
- Pressure compensating for constant flow from 20 to 80 psi.
- Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- Anti-clogging dome screen filters sediment and particles.
- Compatible with regular and vandal proof M22 & M24 metric housings.
- Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- Laser marked housings with statutory marks.

### Certifications

ANSI/ NSF® -61-372  
ASME A112.18.1M and CSA B125 (30 135 pending)  
Meets **CALGreen** requirements

### Thread & Part Number

Part #	Designation	Thread Size
TSA-220INST-PD	Insert only	
TSA-220MST-PD	Regular male	15/16"-27
TSA-220FST-PD	Regular female	55/64"-27
TSA-220DTST-PD	Regular dual thread	15/16"-27 x 55/64"-27
TSA-220MSTVP-PD	Vandal proof regular male	15/16"-27
TSA-220FSTVP-PD	Vandal proof regular female	55/64"-27
TSA-220DTSTVP-PD	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



### Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)  
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)  
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

### Color Code

Dome	Flow Regulator	Basket
Clear	Yellow	Dark Gray

### Flow Rate Curve

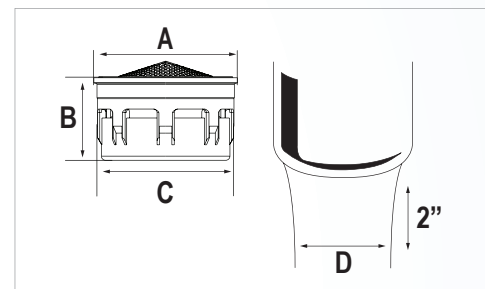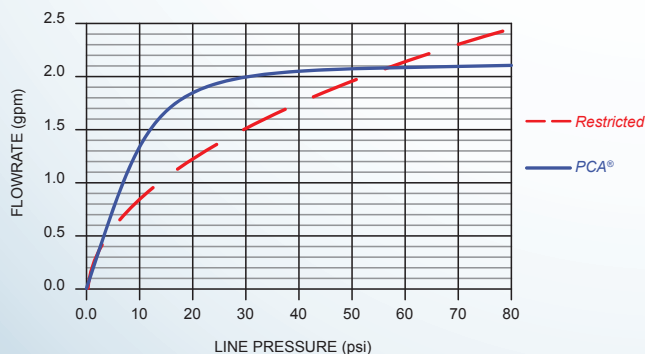

### Dimensions

No	mm	In
A	20.88	.821
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

### Housings



### Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.18.1 testing requirements.

