

Faucet Attachment - 0.5 gpm max Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- ▶ Distinguished stream with delicate lines and a unique spray pattern.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements

Thread & Part Number

Part #	Designation	Thread Size
TSM-050INST-P	Insert only	
TSM-050MST-P	Regular male	15/16"-27
TSM-050FST-P	Regular female	55/64"-27
TSM-050DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
TSM-050MSTVP-P	Vandal Proof Regular male	15/16"-27
TSM-050FSTVP-P	Vandal Proof Regular female	55/64"-27
TSM-050DTSTVP-P	Vandal Proof Regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.




Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Lime Green	Dark Gray

Flow Rate Curve

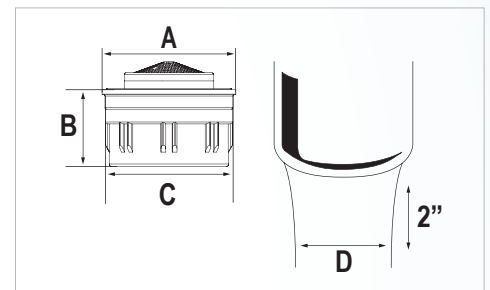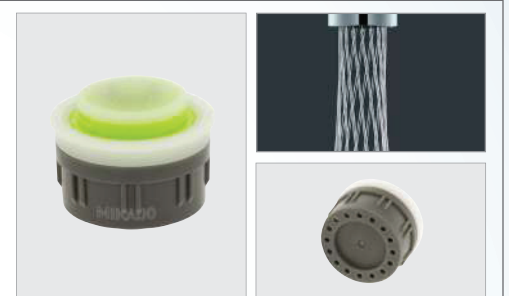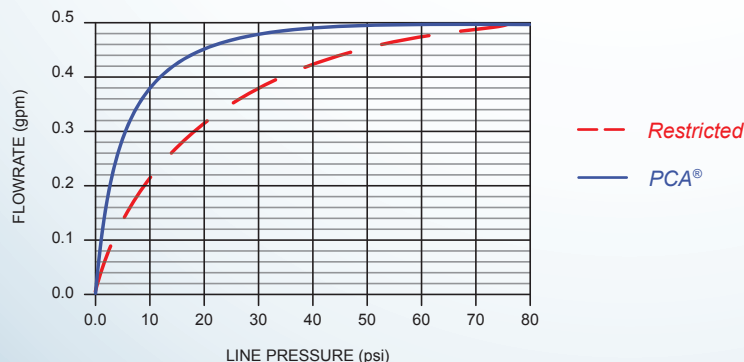

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 25	≈ 1

Housings



Technical Data

Materials: Body Acetal/ Stainless Steel
O-ring EPDM
Washer EPDM

Continuous		Short-term (5 minutes max.) Per ASME A112.18.1 testing requirements.	
max. 60 °C	max. 140 °F	max. 70 °C	max. 160 °F
90psi max.	6.2bar max.	125psi max.	8.5bar max.