

Faucet Attachment - 1.5 gpm max Pressure Compensating Regular Size



flow, stop and go®

Features and Benefits

- ▶ Full size non-aerated spray (Rain Spray) with soft water stream.
- ▶ Unique silicone bottom for easy cleaning.
- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/ NSF® -61-372
ASME A112.18.1M and CSA B125
Meets **CALGreen** requirements
WaterSense



Thread & Part Number

Part #	Designation	Thread Size
TSSR-150INST-P	Insert only	
TSSR-150MST-P	Regular male	15/16"-27
TSSR-150FST-P	Regular female	55/64"-27
TSSR-150DTST-P	Regular dual thread	15/16"-27 x 55/64"-27
TSSR-150MSTVP-P	Vandal proof regular male	15/16"-27
TSSR-150FSTVP-P	Vandal proof regular female	55/64"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (bag), 50 pcs (bag)
Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Natural	Green	Dark Gray

Flow Rate Curve

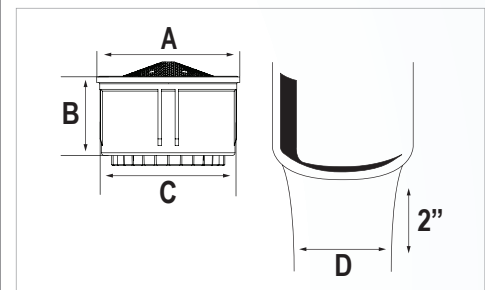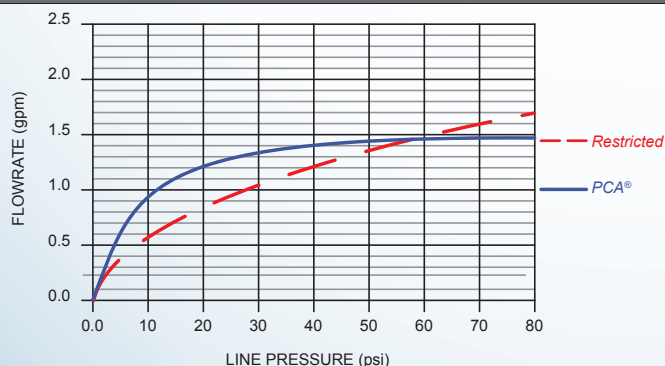

Dimensions

No	mm	In
A	20.85	.825
B	11.45	.451
C	19.97	.786
D	≈ 32	≈ 1 1/4

Housings



Technical Data

Materials: Body Acetal
Tip Silicone
O-ring EPDM
Washer EPDM

Continuous

Short-term (5 minutes max.)
Per ASME A112.18.1 testing requirements.

